

AN INVESTIGATION OF VARIOUS
TYPES OF ELECTRICAL
DISTRIBUTION SYSTEMS
FOR WARSHIPS

BY
RICHARD VERNON SMITH

Library
U. S. Naval Postgraduate School
Annapolis, Md

6129AT
229922

AN INVESTIGATION OF VARIOUS TYPES OF
ELECTRICAL DISTRIBUTION SYSTEMS
FOR WARSHIPS

by

RICHARD VERNON SMITH
Lieutenant, U.S. Navy

S.B., Harvard University
(1941)

SUBMITTED IN PARTIAL FULFILLMENT OF THE
REQUIREMENTS FOR THE DEGREE OF
NAVAL ENGINEER

at the

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
(1950)

Cambridge, Massachusetts
May 19, 1950

Professor J. S. Newell
Secretary of the Faculty
Massachusetts Institute of Technology
Cambridge, Massachusetts

Dear Sir:

In accordance with the requirements for the degree of Naval Engineer, a thesis entitled "An Investigation of Various Types of Electrical Distribution Systems for Warships" is herewith submitted.

Respectfully,

TABLE OF CONTENTS

	<u>Page</u>
I Summary.....	1
II Introduction.....	3
III Procedure.....	9
IV Results.....	15
V Discussion of Results.....	18
VI Conclusions.....	22
VII Recommendations.....	23
VIII Appendix.....	24
A. Bibliography.....	25

I. Summary

The radial system of electric power distribution currently used in warships has proved highly reliable. However a discontinuity of power is introduced whenever a load is shifted from one source of power to another. This usually occurs in after battle damage when a discontinuity of fire power and other vital services can least be supported.

This thesis considers two possible substitutes for the radial, split-plant system: distribution by a network; distribution by a radial system in which the alternate feeders to the loads most requiring continuity are tied to a common bus at the load. In the latter plan, inverse power relays are provided at either end of the feeders to retain the load control feature of the radial system (the ability to disconnect any load from any switchboard by a circuit breaker at the board.)

To determine the features of a network system to be expected in a shipboard application, the network analyzer was used to make an actual layout. Normal operation, damaged operation and short circuit conditions were all studied. The best arrangement of generator feeders was investigated under all of these conditions. The findings are summarized in the paragraphs that follow.

The current loading of cable in a network is aided by delivering power to various parts of the network in proportion

to the power needs of that part. This goal is facilitated when generators can be placed in areas where the heaviest loads exist. Division of power among the various feeders emanating from a generator must also be proper to attain this objective. Increasing the impedance of feeders carrying excess current by means of a reactor was found to be better than decreasing the impedance of feeders carrying a deficiency of current.

Selective operation of limiters in a network, even after damage, requires at least two feeders from different generators to each end of the network. Reactors, which aid in arranging cable loading, also aid in current distribution under short circuit.

Load control is difficult to arrange in a network system. The need for load control can be avoided if the generators are large enough relative to the total load.

Continuity can be attained in a radial system for the loads most requiring it by tying their feeders to a bus at the load and providing inverse power relays on these feeders.

The best method, presently feasible, of obtaining improved continuity of power is to connect the load and its feeders to a common bus at the load and to provide inverse power relays at either end of the feeders.

Network distribution still remains a possibility for future when it has been worked out in all details.

to the power needs of that part. This goal is facilitated when generators can be placed in areas where the load is heavy. Division of power among the various leaders emanating from a generator must also be proper to attain this objective. Increasing the frequency of leader activity and excessive current by means of a leader was found to be better than decreasing the frequency of leader activity a deficiency of current.

Reliable operation of lines in a network, even after damage, requires at least two leaders from different generators in each end of the network. Leaders, which aid in maintaining cable loading, also aid in current distribution under most circuits.

Load control is difficult to arrange in a network system. The need for load control can be avoided if the generators are large enough relative to the total load. Reliability can be attained in a radial system for the loads were supplied by by tying their leaders to a bus at the load and providing inverse power relays on these leaders. The best method, presently feasible, of obtaining improved reliability of power is to connect the load and its leaders to a common bus at the load and to provide inverse power relays at station end of the leaders. Network distribution still remains a possibility for future when it has been worked out in all details.

II Introduction

Although the distribution of electric power in warships has been perfected to a high degree of reliability, the matter of continuity of power has not been so readily dealt with. For this reason both the British and the Americans have given serious consideration or actual trial to systems other than the radial, split-plant system now standardized in our warships. The hope has never died that one of these schemes of power distribution could be perfected to the point of equal reliability and improved continuity as compared with radial distribution.

Standard practice in the American Navy requires two or three separate cables for each vital load and one cable for each non-vital load center. Each of these cables comes to a given load center from a different generator and serves as an alternate source of power. The result is that the many feeders required run in large groups through fore and aft cableways while alternate paths are kept independant by running the various feeders to any one load in different cableways, physically remote from each other. Since no two generators may be run in parallel, a selective device must be placed at the load which will automatically or manually shift from a cable on which power has failed to another which may yet be intact. This introduces a discontinuity, usually under battle conditions when it can least well be supported. The problem is therefore to provide in some acceptable manner

II. Introduction

Although the distribution of electric power in various parts of the country has been characterized by a high degree of reliability, the matter of continuity of power has not been so readily dealt with. For this reason both the public and the Government have given various considerations as to the reliability of power supply. It is not only the reliability of power supply but also the cost of power which has been a matter of concern. The hope has never been lost that one of these factors of power distribution could be perfected to the point of equal reliability and improved continuity as compared with other distribution.

Abundant practice in the United States requires two or three separate cables for each wire line and one cable for each non-vital load center. Each of these cables carries a given load center from a different generator and serves as an alternate source of power. The result is that the heavy loads required run in large groups through low and air-circulating while alternate cables are kept independent by using the various cables to any one load in different cable ways. Typically, however, from each cable, since no two generators may be run in parallel, a selective device must be placed at the load which will automatically or manually shift from a cable on which power has failed to another which may not be failed. This introduces a discontinuity, usually under local conditions when it can itself well be supported. The problem is therefore to provide in some acceptable manner

parallel sources of power at each load. In that way the loss of one source will not interrupt the power to vital equipment.

Both American and British experience with parallel operation of generators has been blighted with maloperation of protective devices. It can be expected, nevertheless, that this objection will be short lived. Especial hope is offered with the prospects of adapting the current limiter (high capacity fuse) to Naval use. Commercial power companies have long used current limiters throughout their networks with singular success. The simplicity of fuse construction precludes improper operation, and experience has born out this conclusion. It is therefore quite understandable that the Navy Department has kept up its interest in the possibility of parallel operation of power sources, even in the face of previous discouraging results.

The system of power distribution most frequently proposed as a substitute for the present radial, split-plant system is the network system. Networks have been the standard method of power distribution ashore for many years and have proved fully reliable. In order to evaluate the possibilities of such a system, the network analyser was employed to study the problems peculiar to shipboard. It is the results of this study which are presented here in this thesis.

parallel sources of power or even load. In that way the
loss of one source will not interrupt the power to vital
equipment.

Both American and British experience with parallel
operation of generators has been obtained with cooperation
of protective devices. It can be argued, nevertheless,
that this objection will be short lived. Special steps are
offered with the progress of making the present limits
(high capacity limit) to have less. Commercial power com-
panies have been used to have limited limits throughout their
networks with similar success. The simplicity of load
connection provides symmetrical operation, and experience
has shown that this assumption. It is therefore quite under-
standable that the Navy Department has kept up its interest
in the possibility of parallel operation on power systems,
even in the face of previous discouraging results.

The system of power distribution used frequently two-
point as a substitute for the present radial, split-point
system is the network system. Networks have been the stan-
dard method of power distribution where low cost power and
have become fairly reliable. In order to maintain the possi-
bilities of such a system, the network engineers are required
to study the problems involved in such a system. It is the
purpose of this study which are presented here to this study.

The idea of using networks on ships is not a new one, and several sound conclusions have already been reached. It is generally agreed by those who have studied the problem that there is a definite improvement of continuity over that of the radial system. It has also been found that more weight is required. In smaller ships it was felt that the emergency generators were too small to be tied in to the network so that a separate distribution system for these generators would be required. The systems described in this paper were specifically designed to minimize the first of these objections and to eliminate the second.

Several axioms for shipboard networks have been passed down from previous studies and were accepted as definite criteria. All of these are aimed at providing selectivity in the case of short circuit. It will shortly be seen that this requires that all limiters in the network be of the same size (except those to the loads and sources) which in turn requires that all cable be of the same size. This was taken the first axiom.

If a fault occurs in the middle of a cable, the limiters at either end of the cable leading to the junction should open. In order that the proper limiter burn out before any other, it is considered necessary that its current be at least one and a half times larger than that of any other. To obtain this objective it has been found necessary to provide at least four cables at each junction. This means

that while fault current is flowing out of the junction into the damaged cable, it is flowing into the junction through at least three other lines. This division of current generally results in at least one and a half times as much amperage in the faulted line, thus providing selective operation of the fuses. The same results may be obtained when there are only three cables at a junction, but a rather small inequality in the division of current between the two which are feeding into the junction will result in the larger being too near in magnitude to that of the faulted cable.

Previous practice has always been not to require that diesel generators be suitable for paralleling with the turbo-generators or with each other. To make paralleling possible, suitable damping windings and possibly a flywheel must be added. However when it is considered that the entire emergency distribution system can be eliminated, the extra cost and weight are more acceptable.

Another less obvious difficulty arises when several generators are tied in to the same network. As long as operation is normal, the load may be divided among generators in proportion to their size; but damage may remove some of the generators from service, leaving too large a load for the remaining units. In the case studied in this thesis, each main generator is large enough to carry the entire load of the ship. The emergency diesel generators, however, are each

that while these elements are flowing out of the junction into the bearing coils, it is flowing into the junction through at least three other lines. This division of current generally results in at least one and a half times as much ampere in the bearing coils, than ampere in the other lines. The same reasoning may be extended upon action of the lower. There are only three coils in a junction, and a portion will inevitably in the division of current between the two which are feeding into the junction will result in one larger being too near in magnitude to that of the limited cable.

Further practice has always been used to require that direct connection be established for handling with the transformer or with some other. To make parallel possible, valuable design, analysis and possibly a physical test is needed. However when it is considered that the entire energy distribution system can be eliminated, the time cost and weight are more negligible.

Another loss of time and effort is when several transformers are tied in to one same network. As long as operation is normal, the loss may be divided among transformers in proportion to their size; but when one transformer is the transformer from another, leaving the latter a load for the remaining units. In the case of this model, each unit transformer is larger enough to carry the entire load of the ship. The emergency direct transformer, however, can reach

capable of carrying only one quarter this amount. In the radial system, it is possible to limit the number of loads carried by any generator and to select among the various connected loads simply by open-circuiting the feeders to undesired loads. Obviously some such control of loading must be used to permit the diesel generators to feed into the network.

Several methods of paralleling generators are possible which do not give up control over the number of loads which must be fed. The simplest is to use bus ties between the generator boards and employ radial distribution. However this improves continuity only in the case of a generator failure. The load still must be shifted from one radial feeder to another whenever power fails on the feeder in use.

The second method would parallel the generators at the loads instead of at the switchboards. This requires radial distribution and the various cables to any given load are tied together in a junction at the load. In order to disconnect any load from the system, each of the radial feeders to it must be opened at each of the individual boards. To make it possible to control the loading of a generator from its own board alone, inverse power relays would have to be placed on the feeders whenever more than one is run to a single load. If this were not done, power could flow out any feeder in use to a load junction, thence to other boards and to any load these other boards might be feeding. Inverse power relays would prevent power flow in the inverse direction

the system. The use of a differential amplifier to feed into the input of the system is not recommended. The use of a differential amplifier to feed into the input of the system is not recommended. The use of a differential amplifier to feed into the input of the system is not recommended.

[illegible]

(toward the generator) in the various feeders and would in that way make only one path available from a given generator to a given load. This path could then be opened or closed at the switchboard of the generator in question giving complete control locally of the loads to be supplied. The objection to this is the large number of relays required and the consequences of a sticky relay.

A third plan to control the loading of a generator would provide relays on non-vital loads which would operate when a high frequency signal was injected into the distribution system. This would not necessarily be intricately designed to give individual control over each non-vital load but would at least permit unloading the excess power requirements in time of need. This plan has much to commend it: false signals are rather easily prevented and a sticking relay will not defeat the system. Furthermore it is equally applicable to radial and to network distribution.

With network distribution, the choice of methods for load control is somewhat more limited. A network may be made divisible into sections which can be dropped from the system or fed independently of other sections. An emergency distribution system of radial type may second the network. In the work which follows, a combination of both was used.

(downward the resistor) in the various sections and would in that way make with one such resistance from a given resistor to a given load. This would make it possible to adjust at the resistance of the resistor in relation to the load. The plate circuit locally of the load to be adjusted. The objection to this is the large number of relays required and the transparency of a relay relay.

A third plan to control the loading of a generator would provide relays on non-still loads which would operate when a high frequency signal was injected into the distribution system. This would not necessarily be injectively designed to give individual control over each non-still load but would at least permit adjusting the various power relays means in time of need. This plan has been discussed in the literature and is rather easily protected and a similar relay will not leave the system. Furthermore it is equally applicable to radial and to network distribution.

With network distribution, the number of relays for load control is somewhat more limited. A network may be made distributive into sections which can be grouped from the system on the independence of other sections. In emergency distribution system of radial type and section the network. In the network which follows, a consideration of load was made.

III Procedure

The attack followed by this thesis may be divided into three parts: laying out a suitable network for study, setting up the network on the network analyzer, and refining the layout in accordance with the information obtained from the analyzer. This section of the thesis will follow through the details of these steps.

Because of the limits imposed by time and the size of the analyzer, it was necessary to design for a fairly small ship. To keep the design practical it was decided to design for a ship already in existence. Complete information on the electrical system on the 692 class destroyers was available, making this a natural choice. Before long it was discovered that even for this limited design all but a few elements on the analyzer were required to make the network. The conclusions, however, are applicable to shipboard networks of any size.

The geometry of a ship gives a characteristic shape to its electrical distribution system. Long fore-and-aft runs of cable with short runs in other directions are naturally to be expected. The first decision was therefore the number of longitudinal cables to use. This can not usefully be more than the number of locations in the cross-section which can be considered sufficiently remote from each other so to prevent damage to more than one location from a single hit. The number of such locations was judged to be three on a

The above following by this means may be divided into three parts: laying out a suitable network for study, setting up the network on the computer, and obtaining the layout in accordance with the information obtained from the computer. This section of the thesis will follow through the details of these steps.

Because of the limits imposed by time and the size of the computer, it was necessary to design for a fairly small ship. To keep the design practical it was decided to design for a ship already in existence. Complete information on the electrical system on the USS Albatross was available, making this a natural choice. Before long it was discovered that even for this limited design all but a few elements on the computer were required to make the network. The shortcomings, however, are applicable to any other type of ship.

The concept of a ship gives a considerable jump to the electrical distribution system. Long time-and-ship were of course with ships in other situations and naturally to be expected. The first decision was therefore the number of longitudinal cables to use. This was not initially to have been the number of locations in the cross-section which can be considered sufficiently remote from each other so as to prevent damage to more than one location from a single hit. The number of such locations was judged to be three on a

destroyer. Previous studies of destroyer network systems have used four longitudinal runs without increase in weight over three, but it was felt that a study involving only three fore-and-aft members was the most suitable for the size of the analyzer. No lack of generality in the conclusions resulted from this. The locations chosen for the longitudinal cable are shown in Figure 1.

The next detail to be fixed was the number and location of the athwartship cables. In order to provide multiple paths to vital equipment, it is necessary to have a node in the network located at the equipment. The nodes are made by connecting each of the three longitudinal runs of cable to each other in the athwartship plane. This follows the axiom that at least four fuses (other than load fuses) must be found at each node. The number of places at which athwartship ties were made (appearing as triangles in Figure 1) was determined solely by the number of vital loads to be supplied.

The next step was to enter the cable lengths and wattages required by the system. Load sizes were taken from the operating loads given in Bureau of Ships plan number DD692-S6202-301 Alt. 3 entitled Preliminary Power Analysis. Cable lengths were estimated from the geometry of the ship. The vertical, horizontal and athwartship distances between the ends of the cable were added plus an allowance of ten feet which might be required at the ends; this sum was then

destroyer. Previous studies of destroyer command systems have used long independent runs without increases in weight over time, but it was felt that a study involving only these low-and-slow-and-steady runs was not suitable for the size of the workshop. The lack of consistency in the exercise results from this. The following system for the longitudinal cable was shown in Figure 1.

The next detail to be fixed was the number and location of the processing cables. In order to provide multiple paths to visual equipment, it is necessary to have a cable the network located at the equipment. The network was made by connecting each of the three longitudinal runs of cable to each other in the appropriate places. This follows the extent that at least four times (about three times) must be found at each node. The number of nodes at which the network was made (expressed as explained in Figure 1) was determined solely by the number of visual loads to be

supplied.

The next step was to order the cable lengths and weights required by the system. Load sizes were taken from the system size loads given in Figure 2. This plan number 1005-2000-10-11. A detailed preliminary power analysis, cable lengths were estimated from the geometry of the ship. The vertical, horizontal and diagonal distances between the ends of the cable were added plus an allowance of feet load which could be required at the ends of the cable.

Network for 692 Class Destroyer

Diagramatic Elevation of Network without Feeders


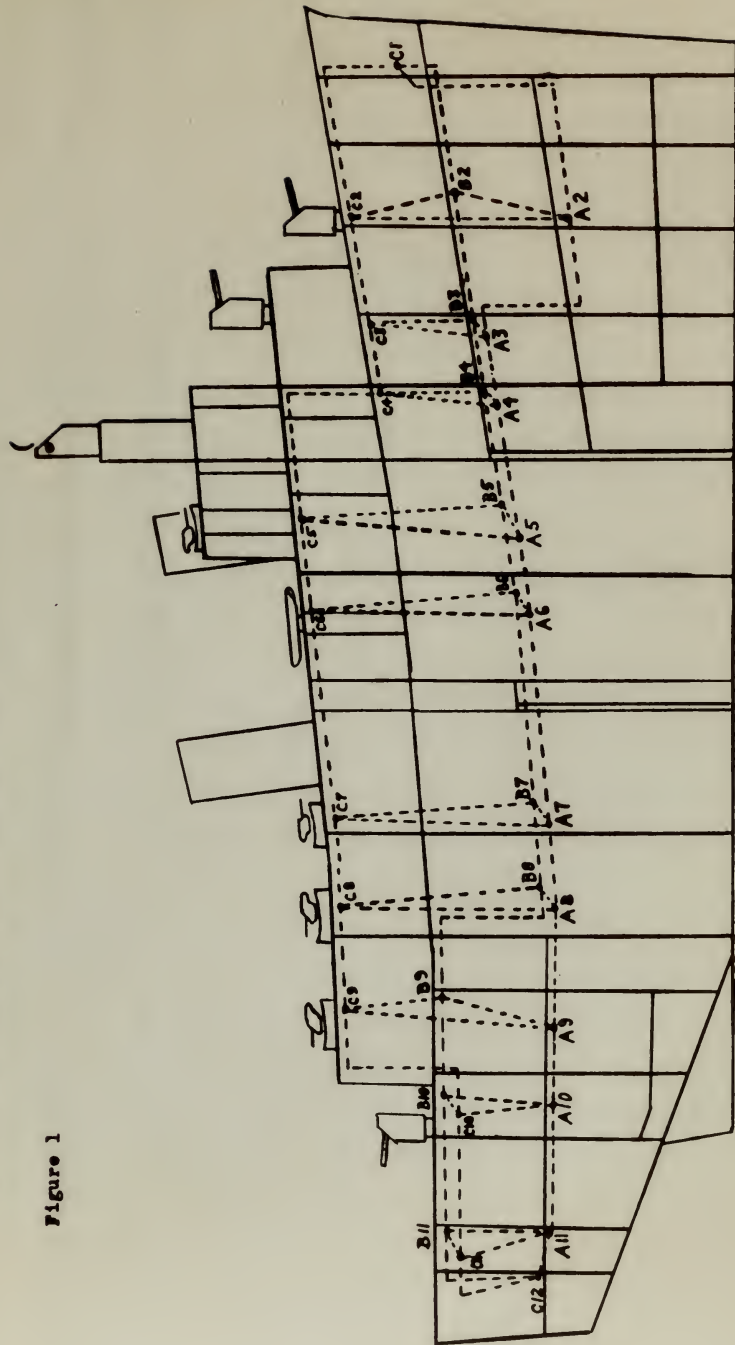


Figure 1

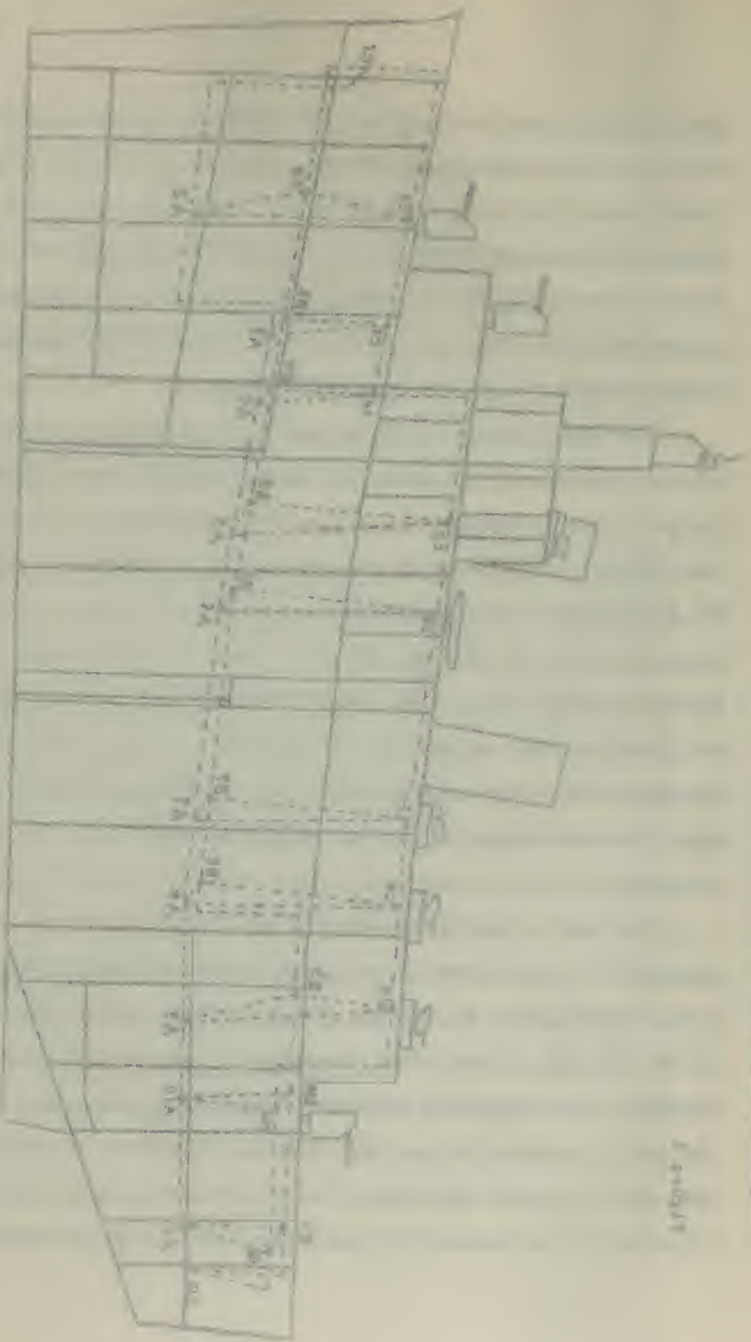

increased by ten percent to allow for slack and obstructions. Both the calculated lengths and the power requirements are displayed in Figure 2.

The cable size necessary was estimated as THFA 250 with a larger for the generator feeders. Impedances were then easily found and the analyzer was set up in a routine manner. Generator feeders were not included at first as their exact location was to be investigated with the analyzer. The bases chosen for a per unit representation of the designed system and the board analogue were as follows:

	<u>System base</u>	<u>Board Base</u>	<u>Ratio, System to Board</u>
Voltage	450 v.	125 v.	3.6 to 1
Current	2800 a.	1 a.	2800 to 1
Impedance	.16 ohms	125 ohms	1 to 780
Vector power	1250 KVA	125 VA	10 to 1

Transient reactance, when required, was taken as .17 per unit. The power factors of individual loads was not available so an average power factor for inductive loads was calculated by assuming an overall power factor of .80 and unity power factor for heating and lighting loads. This gave an average value of .73 for inductive loads.

Three generation plans were tried as the investigation proceeded. In Generation Plan #1 each main generator was given two feeders to local points and one to a remote point; in Generation Plan #2 each main generator was given feeders to one local point and two remote points; Generation Plan #3

included by the amount to allow for slack and variations.
Both the estimated losses and the power requirements are
displayed in Figure 3.

The main size necessary was estimated as 250 with
a larger for the generator leaders. Impedances were then
easily found and the analyzer was set up in a position where
generator leaders were not included at first as their exact
location was to be investigated with the analyzer. The
pass chosen for a test was representation of the designed
system and the found impedance was as follows:

System Data	Design Data	Ratio, System to Design
Voltage 450 v.	450 v.	1 to 1
Current 2400 a.	1 a.	2400 to 1
Impedance 1.0 ohm 155 ohms	155 ohms	1 to 155
Vector Power 1250 VA	125 VA	10 to 1

Transient resistance, when required, was taken as .17 per
unit. The power factors of individual loads was not available
also as an average power factor for inductive loads was
calculated by assuming an overall power factor of .80 and
unity power factor for heating and lighting loads. This
gave an average value of .75 for inductive loads.

Three generation plans were tried as the investigation
proceeded. In generation plan #1 each main generator was
given two leaders to local points and one to a remote point;
in generation plan #2 each main generator was given leaders
to one local point and two remote points; generation plan #3


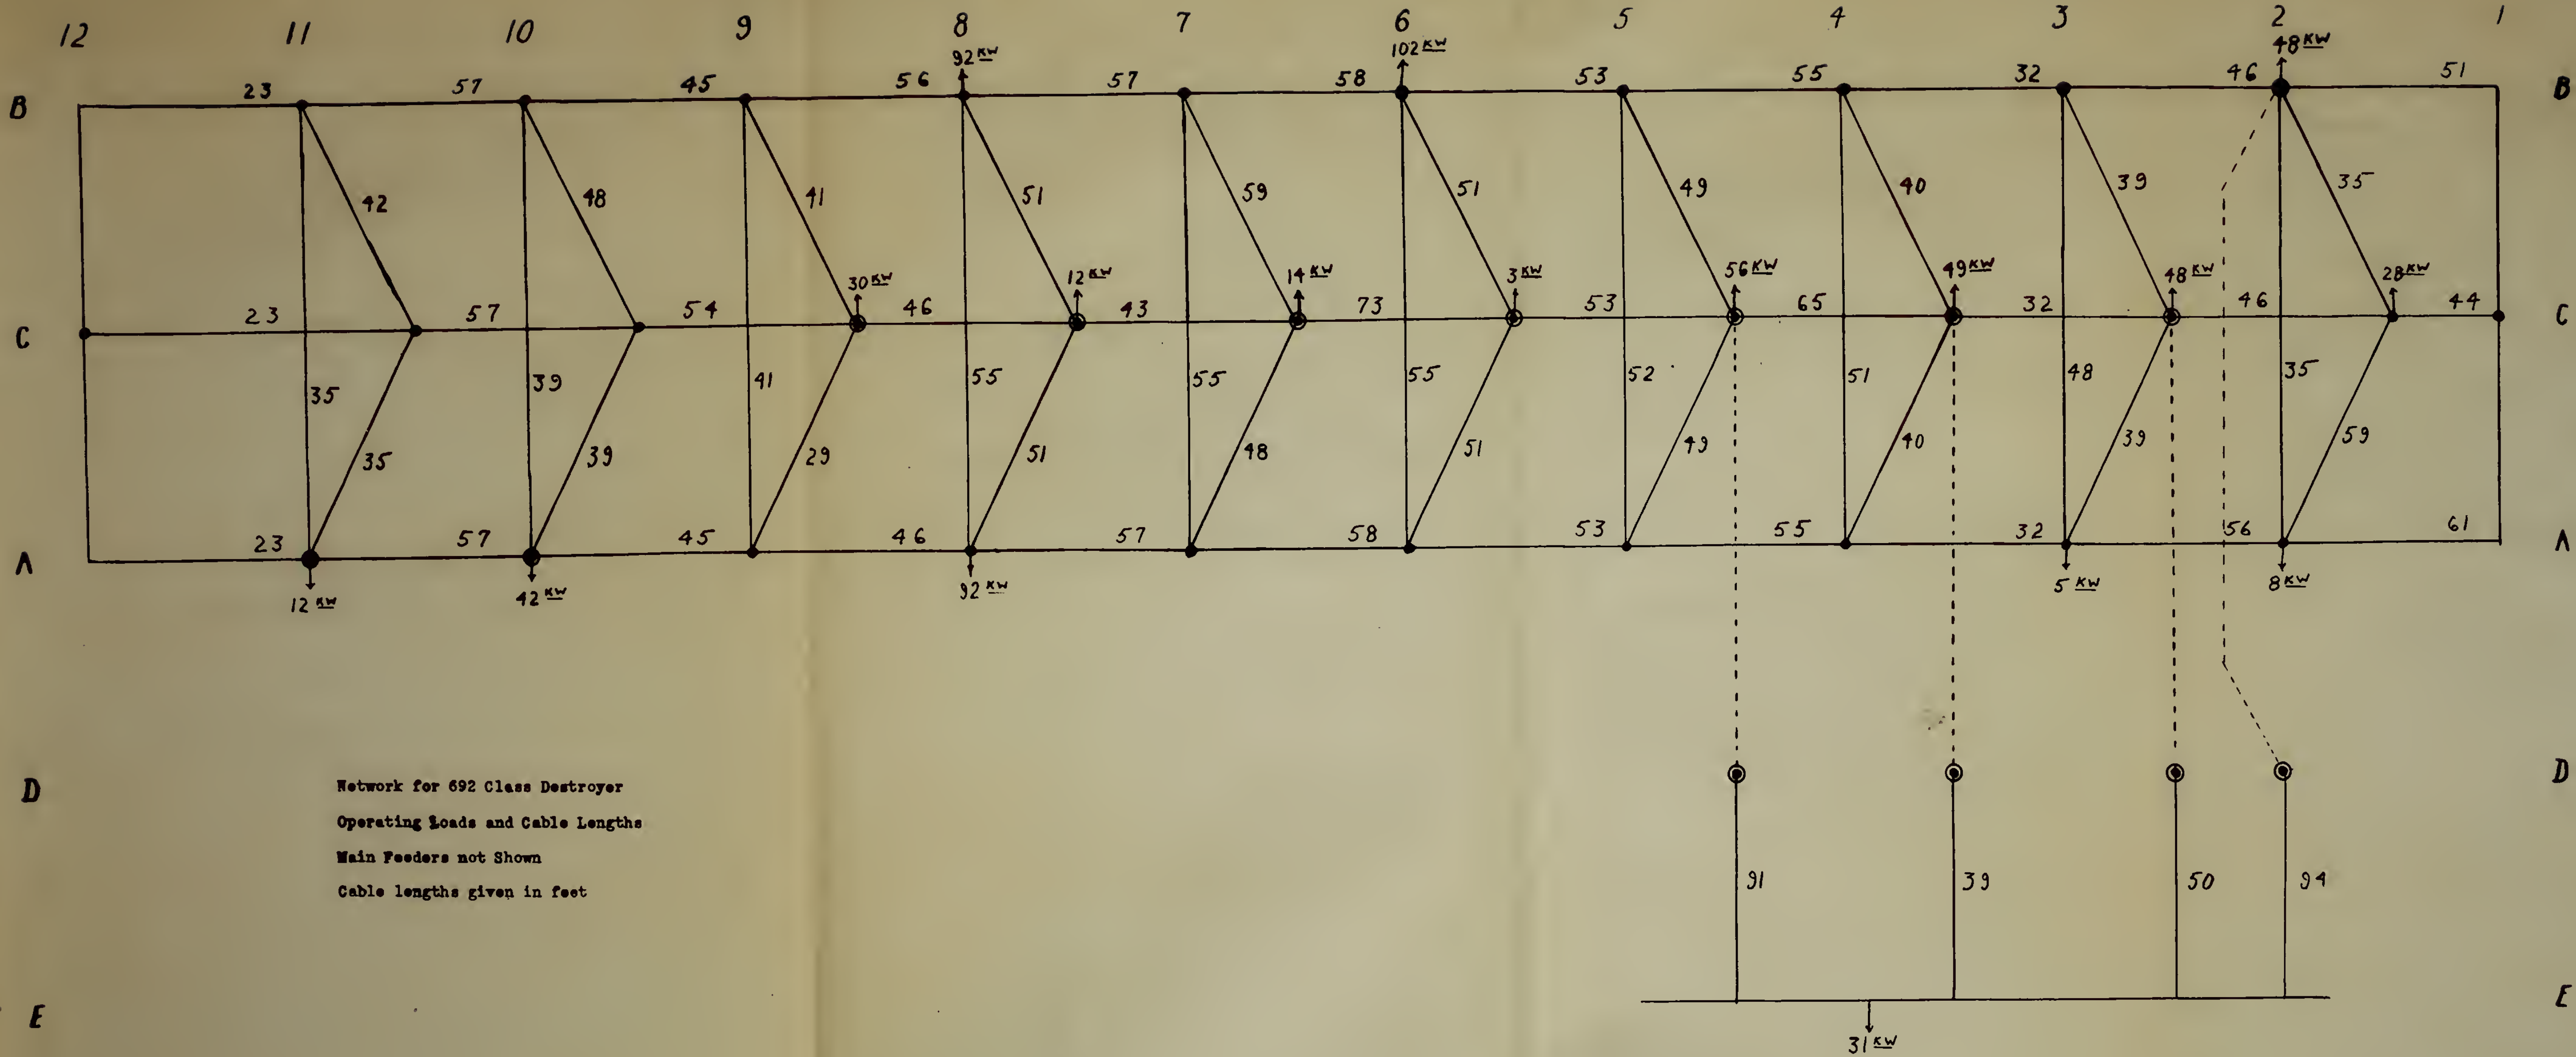


Figure 2

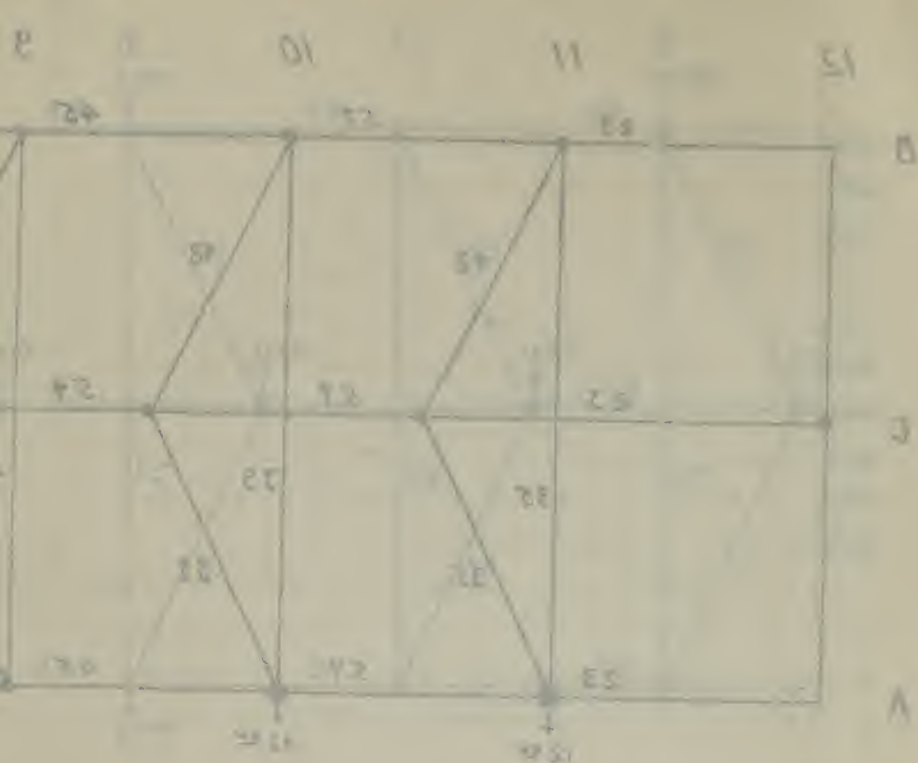

The diagram shows a structural analysis of a truss system. The nodes are labeled A, B, C, and D. The members and their values are as follows:

The diagram shows a structural analysis of a truss system. The nodes are labeled A, B, C, and D. The members and their values are as follows:

differed from Generation Plan #2 by the addition of a reactor in the heaviest loaded feeder of each main generator.

In all three generation plans the two diesel generators were fed into the forward diesel generator switchboard and the after diesel generator board was eliminated. This arrangement followed after some preliminary studies which showed that the forward diesel generator would be overloaded and the after one underloaded. Placing both of these generators forward put them in the area of greatest electrical load which was a definite advantage.

Distribution from the forward diesel generator switchboard was accomplished by four feeders joining the network at points of vital loading (Mount 51, Mount 52, I.C. Room, Radio-Radar.) By a simple arrangement it is then possible to have a breaker which will disconnect both the feeder and the vital load from the network leaving the feeder and the load connected to each other. However these breakers would render standby service only. Their operation may be manual or automatic on inverse power flow.

The normal method of protecting the diesel generators would be by means of inverse power relays which would segregate the forward part of the network from the after part. These relays would be located two between nodes A5 and A6, well separated physically, two similarly between nodes B5 and B6, and two between nodes C5 and C6. With this series-parallel combination the failure of any one relay to open or

derived from Generation Plan 22 by the addition of a reactor in the heaviest loaded feeder of each main generator.

In all three connection plans the two diesel generators

were fed into the forward diesel generator switchboard and

the after diesel generator board was eliminated. This

arrangement followed after some preliminary studies which

showed that the forward diesel generator would be overloaded

and the after one underloaded. Feeding both of these gener-

ators forward put them in the area of greatest electrical

load which was a definite advantage.

Distribution from the forward diesel generator switch-

board was accomplished by four feeders joining the network

at points of vital loading (Mount 21, Mount 22, I.C. Room,

Radio-Radar.) By a simple arrangement it is then possible

to have a breaker which will disconnect both the feeder and the

vital load from the network leaving the feeder and the

load connected to each other. However these breakers would

render standby service only. Their operation may be manual

or automatic on inverse power flow.

The normal method of protecting the diesel generators

would be by means of inverse power relays which would sepa-

rate the forward part of the network from the after part.

There relays would be located two between nodes A2 and A3,

well separated physically, two similarly between nodes B2

and B3, and two between nodes C2 and C3. With this series-

parallel combination the failure of any one relay to open or

shut would not interrupt the correct operation of the system as a whole. The most vital loads on the ship are fed from this forward section of the network, the important exceptions being the steering gear and the after 5" mount. If the ship is reduced to such a state of emergency that both main generators are out of commission, steering may well be done by hand power if required at all. However sufficient capacity remains in the diesel generators to run a feeder direct to the steering gear. Such a feeder would not tie in to the network but would permit switching the steering gear panel from the network to the emergency feeder. As for the after 5" mount, it should be noted that the capacity of the diesel generators is only sufficient to carry two of the main mounts. The present arrangement actually in use permits selection of either Mount 51 or Mount 52; the system considered in this thesis could also provide selection between Mount 53 and Mount 52 with the feeder to Mount 53 arranged similarly to that proposed for the steering gear. In any case these emergency feeders would not affect the operation of the network and were not included in any of the work done on the analyzer.

When the method of generation had been selected for a run and properly introduced into the analyzer set-up, it was then necessary to establish the boundary conditions. In each case not involving short circuits, one main generator was held slack on active power and at the rated voltage of

that would not interrupt the correct operation of the system as a whole. The most vital factor in the ship was the engine. This forward section of the network, the important mechanism being the steering gear and the other 5" mount. If the ship is reduced to such a state of emergency that both main generators are out of commission, steering will be done by hand power if possible at all. However, without assistance remains in the diesel generators to run a leader direct to the steering gear. Such a leader would not tie in to the network and would remain within the steering gear panel from the network to the emergency leader. As for the other 5" mount, it should be noted that the capacity of the diesel generators is only sufficient to carry two of the main mounts. The present arrangement actually is not possible selection of either mount 51 or mount 52; the system considered in this thesis could also provide selection between mount 53 and mount 54 with the leader to mount 53 arranged similarly to that proposed for the steering gear. In any case these emergency leaders would not affect the operation of the network and were not included in any of the work done on the analyzer.

When the method of conversion has been selected for a run and properly introduced into the analyzer system, it was then necessary to establish the boundary conditions. It was not necessary to involve much circuitry, one main generator was held back on active power and of the rated voltage of

the system (125 volts on the analyzer corresponding to 450 volts in the actual system.) The active and reactive power on the other generators were so set as to divide them among the generators in proportion to their ratings. The generators were assumed to be of the same size as those in use in the 692 class destroyer, namely:

Turbo-generators 400 KW each

Diesel generators 100 KW each

Each generator is capable of supporting a 25% overload for two hours and a 50% overload for five minutes.

Runs simulating short-circuit conditions were made by replacing each generator by its transient impedance. Using a method of superposition, voltage was impressed on the system at the location of the short-circuit. The resultant currents flow in the reverse direction of the actual currents under short circuit but nearly equal them in magnitude. The exact short circuit currents may be obtained by superimposing the vector values obtained by the above short circuit method upon the vector currents without short circuit. The latter are small compared to the short-circuit currents so that the values obtained by the approximate method just described may be taken as correct.

the speaker (125 volts on the analyzer corresponding to 125 volts in the actual speaker). The active and reactive power on the three generators were set as to divide them among the generators in proportion to their ratings. The generators were assumed to be of the same size as those in use in the 625 class generator, namely:

Two- generator 100 KW each

Local generator 100 KW each

Each generator is capable of supplying a 5% overload for two hours and a 2% overload for five minutes.

When simulating short-circuit conditions were made by

replacing each generator by its transient impedance. This

a method of approximation, voltage was increased on the

system at the location of the short-circuit. The resultant

currents flow in the various direction of the actual currents

under short circuits was nearly equal in magnitude. The

exact short circuit currents may be obtained by superimposing

the vector values obtained by the above short circuit method

upon the vector currents without short circuit. The latter

are easily computed by the short-circuit currents as that the

values obtained by the approximate method just described may

be taken as correct.

IV Results

After some preliminary trials on the network analyzer, Generation Plan #1 was chosen for the first complete analysis of the network. The results are presented in Figure 3. The points of heaviest current flow are seen to be the fore-and-aft lines just forward of the forward generator (A5 to A6, B5 to B6, C5 to C6) and just aft of the after generator (A8 to A9, B8 to B9, C8 to C9.) Also heavily loaded are the athwartship cables at each main generator (A6 to B6, B6 to C6, C6 to A6, similarly triangle 8.)

Damage to any of the athwartship cables still leaves a large number of other such cables over which the current flow can distribute itself; damage to any longitudinal cable sharply reduces the number of available cables to maintain the current flow in the fore-and-aft direction. The analyzer showed that with two cables damaged the current in the third would be:

<u>In use</u>	<u>Open</u>	<u>Current</u>
A5 to A6	B5 to B6, C5 to C6	126 amps
B5 to B6	C5 to C6, A5 to A6	154 amps
C5 to C6	A5 to A6, B5 to B6	152 amps

The effect of damage to the diesel generators was next studied. Figure 4 presents the current flow when these generators are not operating and each main generator carries half of the total load. Again consideration was made of damaged longitudinal runs of cable with the following results:


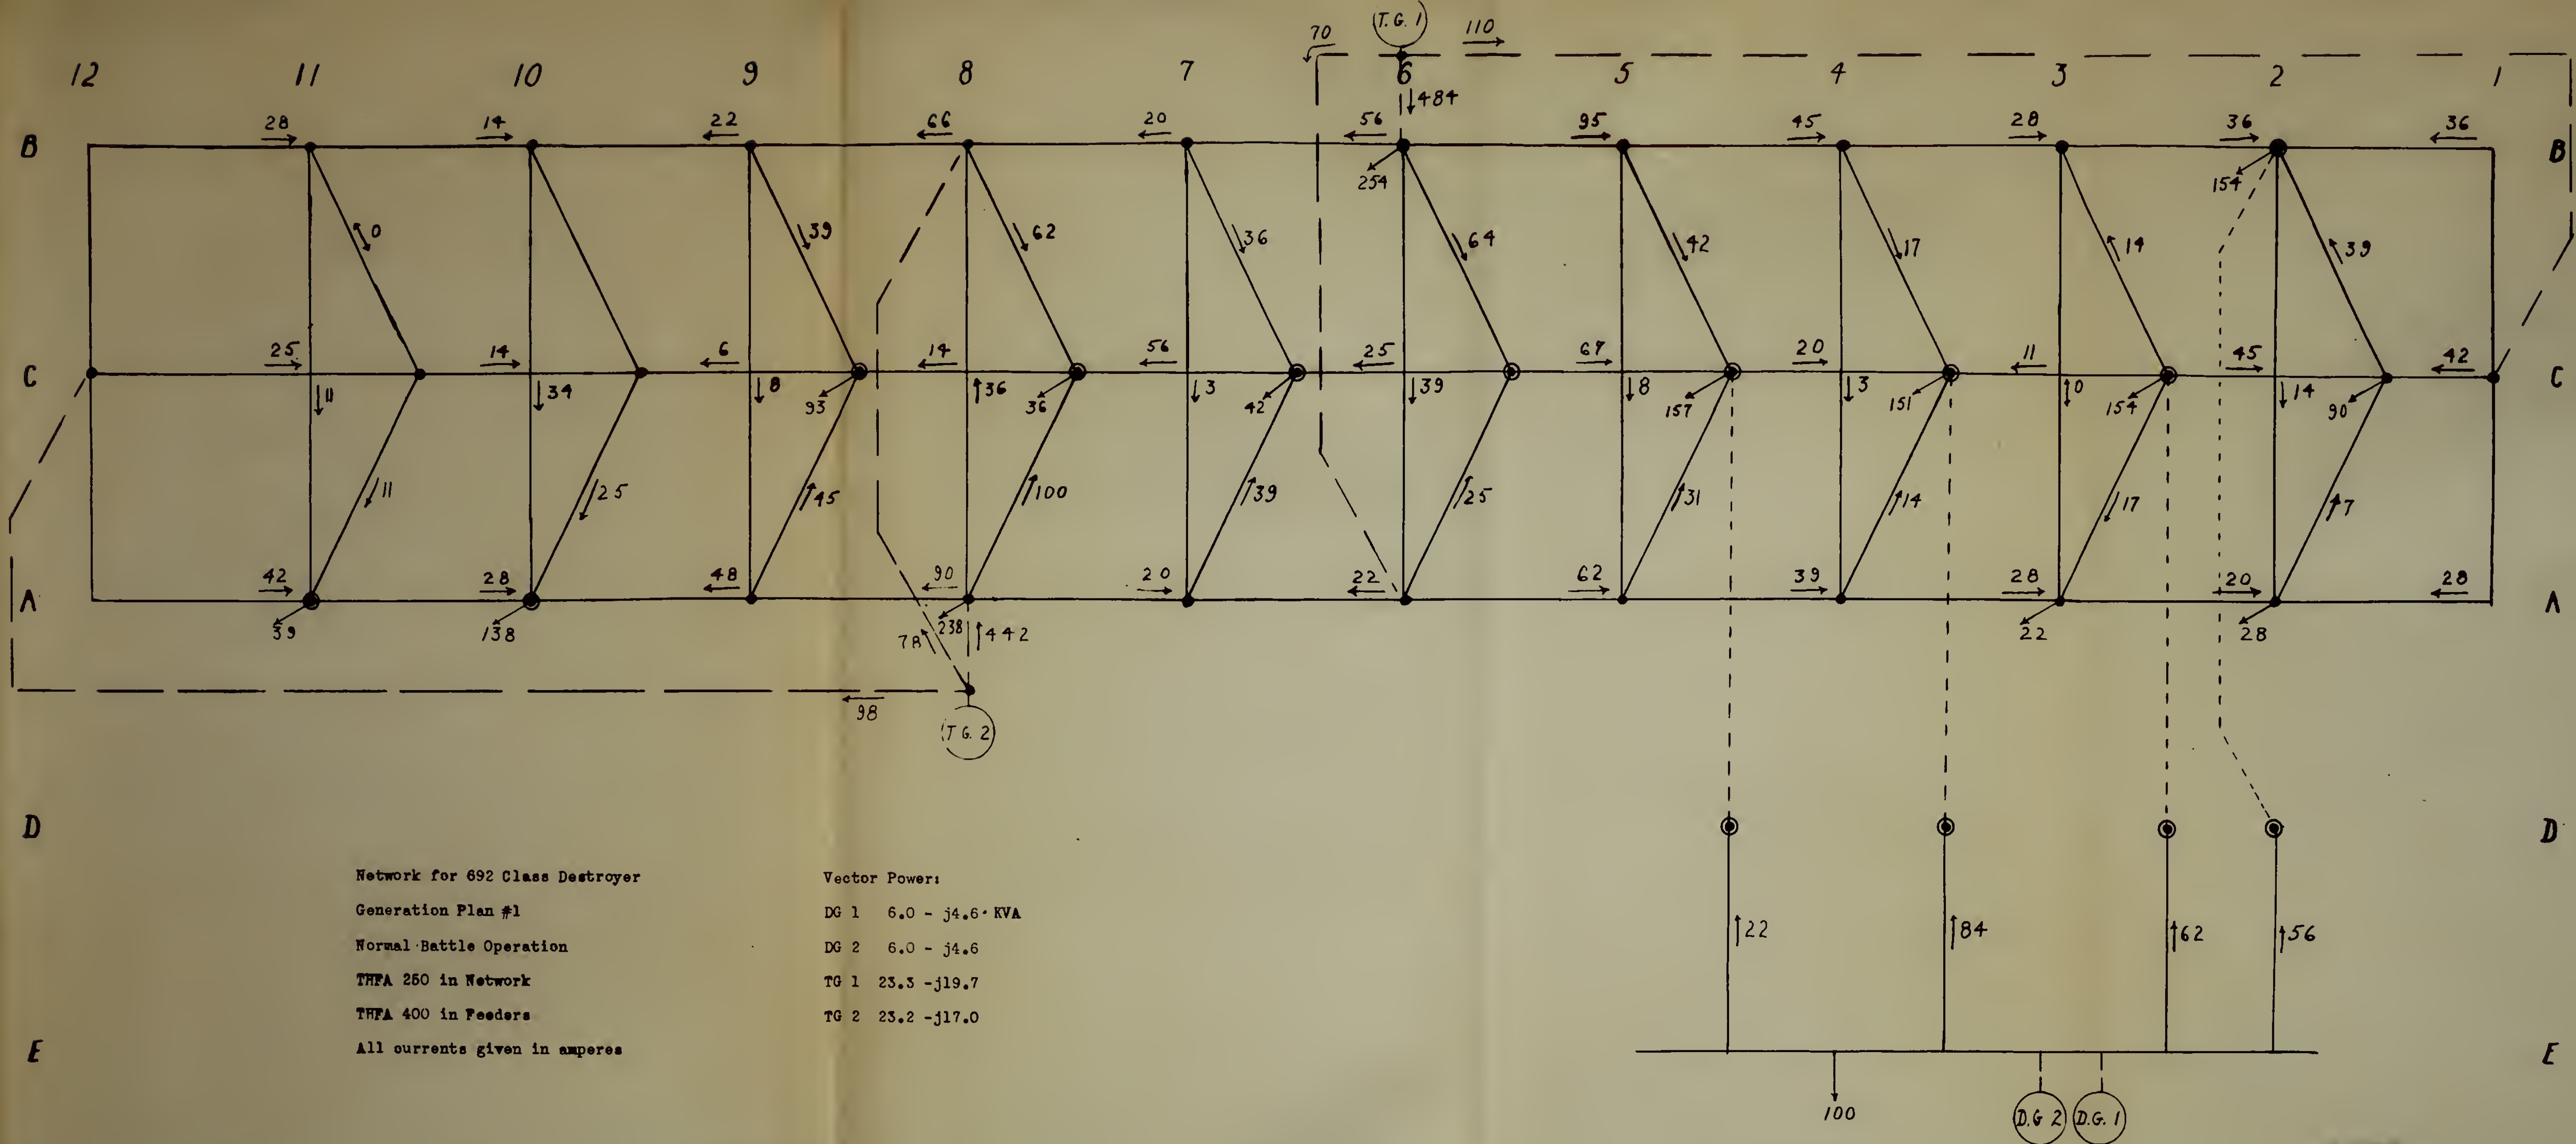


Figure 5

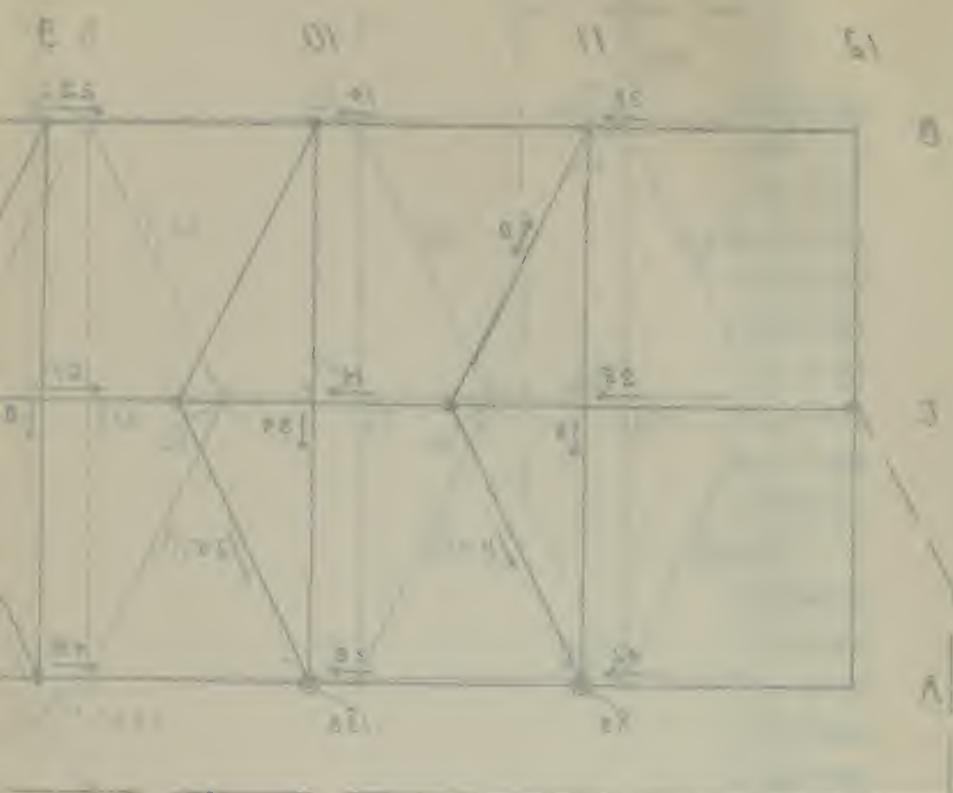

100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square
 100 ft x 100 ft square

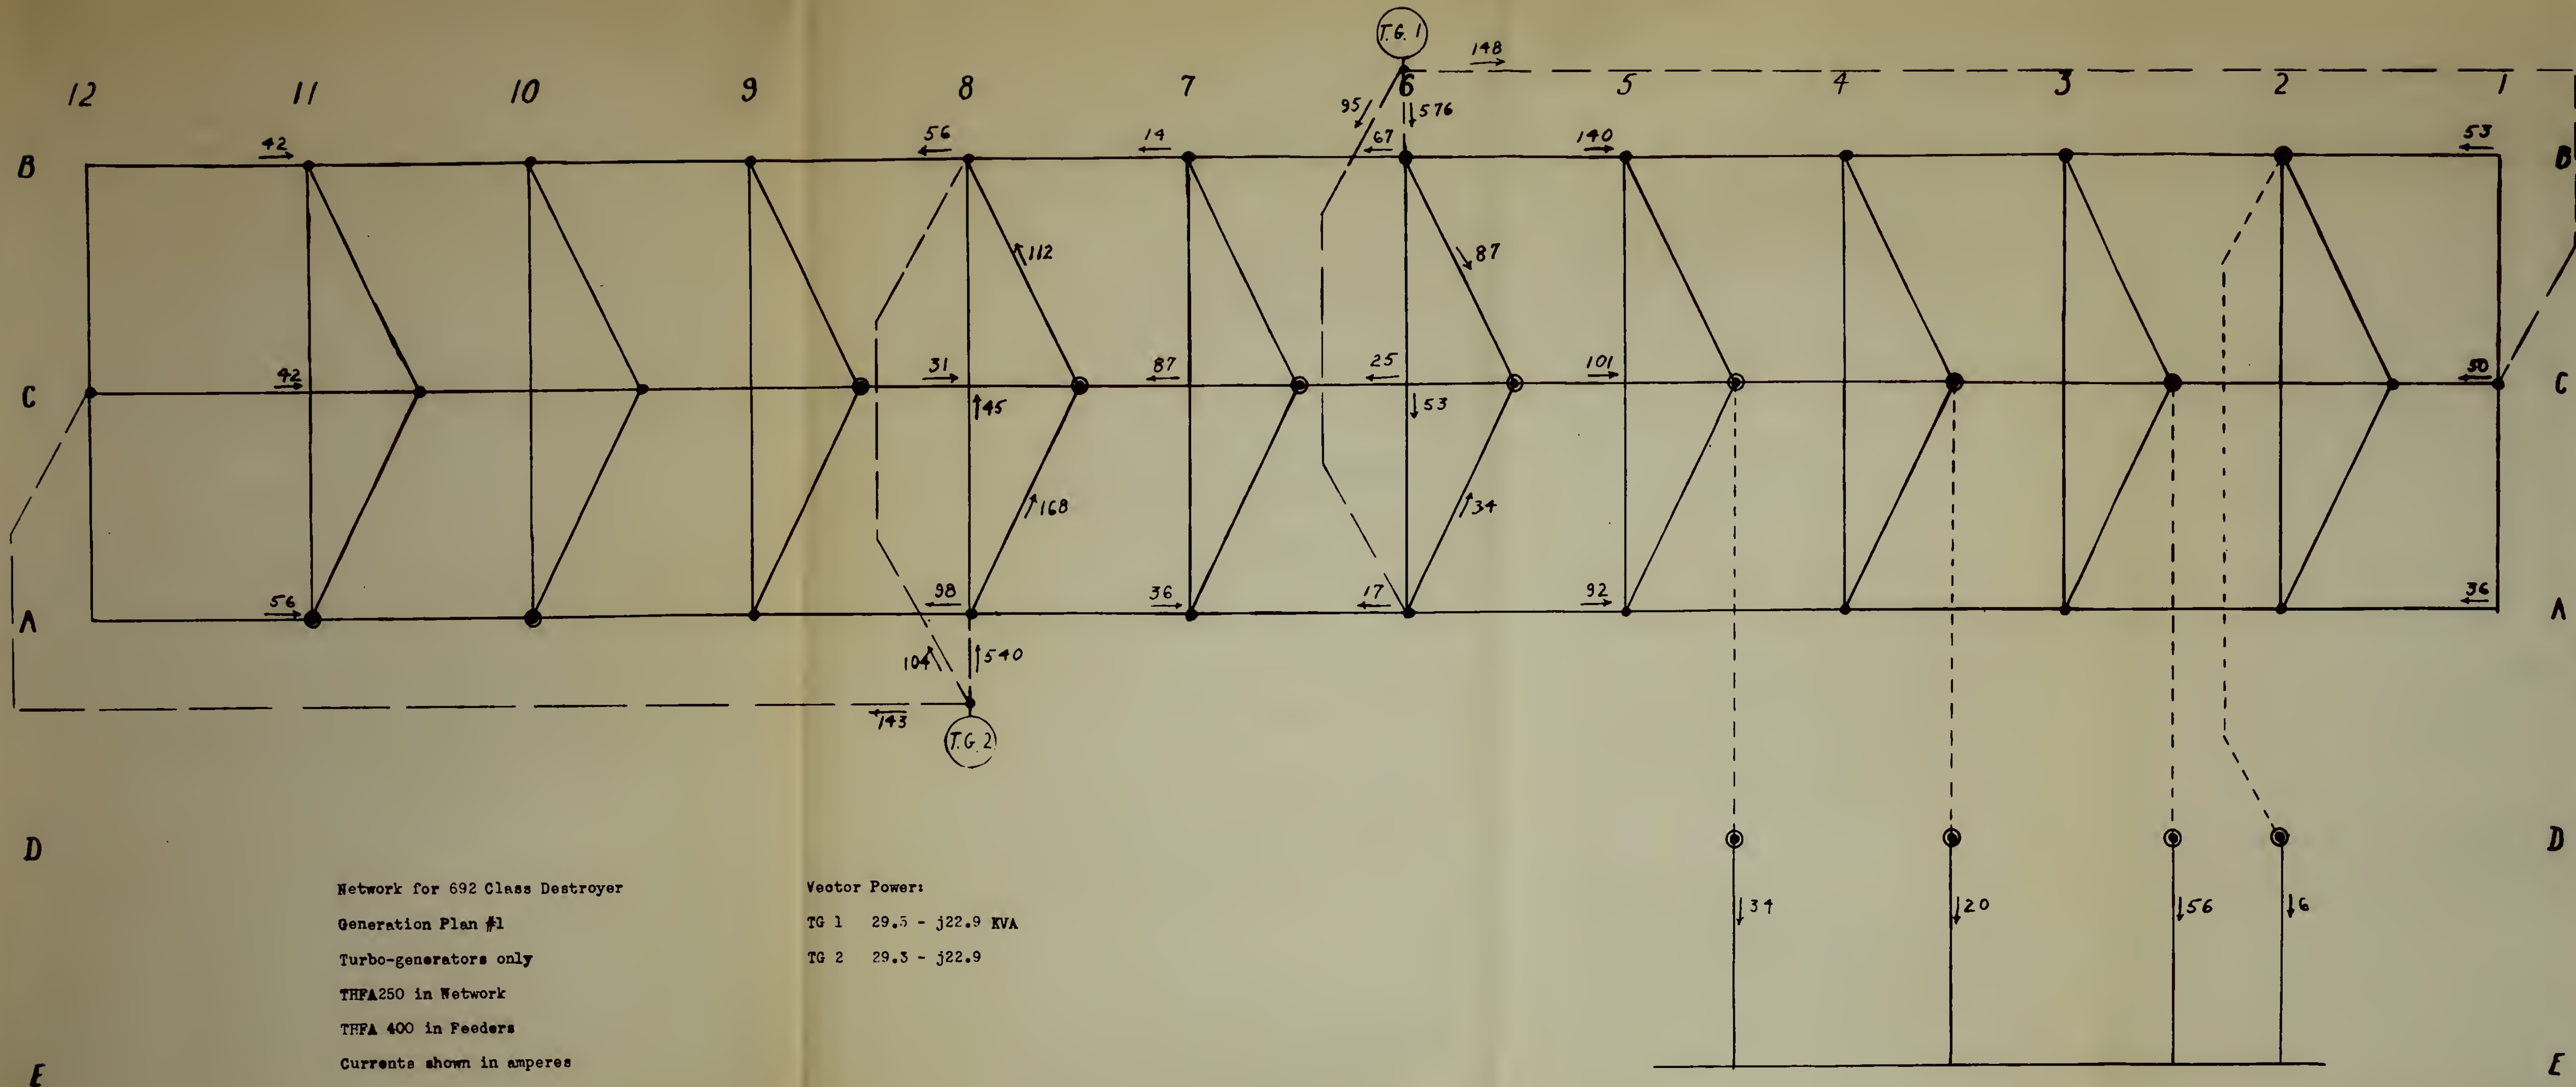


Figure 4

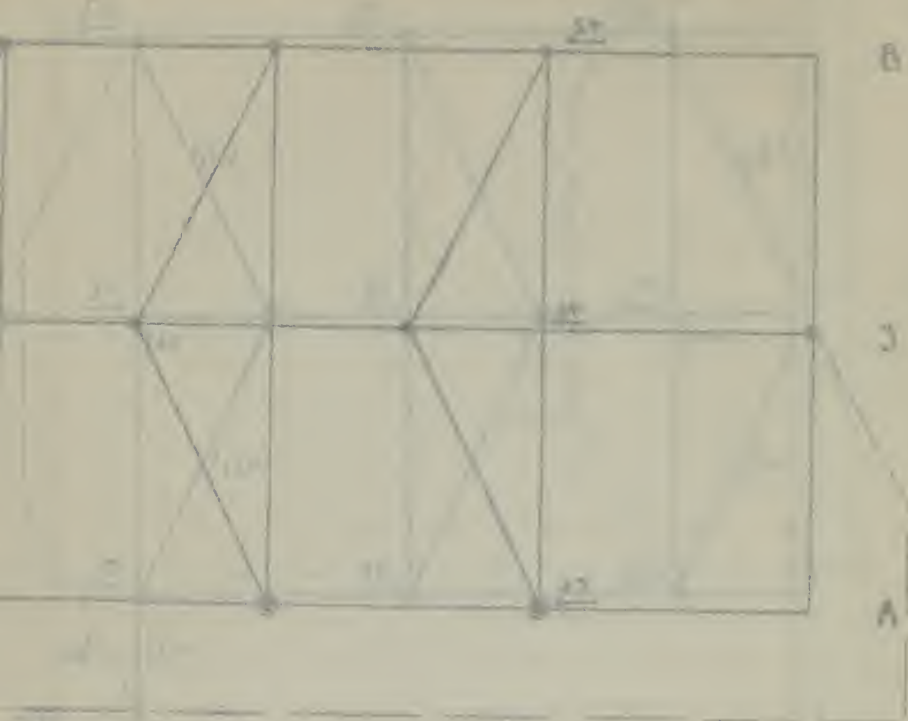


Diagram showing the bracing system for the frame. The bracing is provided in each bay to resist lateral loads. The bracing members are connected to the corners of the frame. The bracing system is designed to provide stability and prevent buckling of the frame members.

D

E

<u>A5 to A6</u>	<u>B5 to B6</u>	<u>C5 to C6</u>
open	171 amps	129 amps
140 amps	open	143
123	168	open
194	open	open
open	221	open
open	open	196

<u>A8 to A9</u>	<u>B8 to B9</u>	<u>C8 to C9</u>	<u>TG2 to C12</u>
105 amps	open	open	157 amps
open	92½ amps	open	179
open	open	134 amps	134

The final study made on Generation Plan #1 was to consider the operation of one turbo-generator only. Figure 5 shows the currents resulting from the operation of Turbo-generator #1. The cables loadings are found to be so great as to approach closely the cable capacity in several places. In these cases any damage to parallel lines would throw an overload on the lines now so close to their limit.

The current distributions obtained in figures three to five show clearly that insufficient power is being fed into the ends of the network. The result is that the cables near the center are loaded to capacity while those at the end are carrying only a fraction of their maximum. When the lines feeding to the ends of the network were each

15 to 16	open	171 mpa	129 mpa	65 to 66
140 mpa	open	145		
125	140	open		
124	open	open		
open	221	open		
open	open	150		
15 to 16	105 mpa	open	open	65 to 66
open	124 mpa	open	157 mpa	65 to 66
open	open	124	124	65 to 66

The final study made on Converter Plan 41 was to consider the operation of one turbo-generator only. Figure 5 shows the average resulting from the operation of Turbo-generator 41. The cable loadings are found to be no great as to approach closely the cable capacity in several places. In these cases no damage to parallel lines would throw an overload on the lines now so close to their limit.

The current distributions obtained in Figure 6 are to five show clearly that inductive power is being fed into the ends of the network. The result is that the cables near the center are loaded to capacity while those at the end are carrying only a fraction of their maximum. When the lines leading to the ends of the network were seen



DISTANCE FROM TO MOBILE
 ADD 100 TO MOBILE
 THAT THE IS KNOWN
 THIS-EXACTLY 40 ONLY
 DEMONSTRATION FIRST 1
 REMOVED FOR THE CLASS DEMONSTRATION

paralleled by another of the same size, no significant improvement was found. It was also found that the feeder from TG#1 to A6 and the feeder from TG#2 to B8 were of no importance to the current distribution. Short circuit studies indicated the same need for feeder rearrangement.

With the above facts in mind, a new generation plan was tried which proved to be unsuccessful in selective operation under short circuit. This plan is presented in Figure 6. Although the lines to the shorted node carry in each case the greatest current, it is not one and a half times greater than the currents in other lines. The result would be the opening of the limiters shown on Figure 6 (A8 to A9, B8 to B9, C8 to C9, B9 to C9, C9 to C10.) This would sever the after end of the network off; still further modification was needed.

In another attempt to divide the currents more equally among the generator feeders, reactors were introduced in the lines TG#1 to B6 and TG#2 to A8. The results are shown in Figures 7, 8 and 9. In Figure 7 the main generator feeder containing the reactor continues to carry the largest part of the current but most of this goes to the large engine room loads at B6 and A8. The longitudinal lines are carrying somewhat less current in the central parts of the network. The improvement made by this arrangement is most pronounced in the short circuit runs presented in Figure 8 and Figure 9. Here the network is effectively selective, and only the lines leading into the shorted node will be opened at the limiters shown in the figures.

paralleled by another of the same size, no significant improvement was found. It was also found that the factor from 101 to 40 and the factor from 102 to 40 were of no importance to the current distribution. About circuit studies indicated the same need for factor improvement. With the above facts in mind, a new generation plan

was tried which proved to be successful in selective operation under about circuit. This plan is presented in Figure 6. Although the lines to the shorted node carry in each case the greatest current, it is not as bad as a half times greater than the currents in other lines. The result would be the opening of the limiters shown on Figure 6 (40 to 41, 42 to 43, 44 to 45, 46 to 47, 48 to 49, 50 to 51, 52 to 53, 54 to 55, 56 to 57, 58 to 59, 60 to 61, 62 to 63, 64 to 65, 66 to 67, 68 to 69, 70 to 71, 72 to 73, 74 to 75, 76 to 77, 78 to 79, 80 to 81, 82 to 83, 84 to 85, 86 to 87, 88 to 89, 90 to 91, 92 to 93, 94 to 95, 96 to 97, 98 to 99, 100 to 101, 102 to 103, 104 to 105, 106 to 107, 108 to 109, 110 to 111, 112 to 113, 114 to 115, 116 to 117, 118 to 119, 120 to 121, 122 to 123, 124 to 125, 126 to 127, 128 to 129, 130 to 131, 132 to 133, 134 to 135, 136 to 137, 138 to 139, 140 to 141, 142 to 143, 144 to 145, 146 to 147, 148 to 149, 150 to 151, 152 to 153, 154 to 155, 156 to 157, 158 to 159, 160 to 161, 162 to 163, 164 to 165, 166 to 167, 168 to 169, 170 to 171, 172 to 173, 174 to 175, 176 to 177, 178 to 179, 180 to 181, 182 to 183, 184 to 185, 186 to 187, 188 to 189, 190 to 191, 192 to 193, 194 to 195, 196 to 197, 198 to 199, 200 to 201, 202 to 203, 204 to 205, 206 to 207, 208 to 209, 210 to 211, 212 to 213, 214 to 215, 216 to 217, 218 to 219, 220 to 221, 222 to 223, 224 to 225, 226 to 227, 228 to 229, 230 to 231, 232 to 233, 234 to 235, 236 to 237, 238 to 239, 240 to 241, 242 to 243, 244 to 245, 246 to 247, 248 to 249, 250 to 251, 252 to 253, 254 to 255, 256 to 257, 258 to 259, 260 to 261, 262 to 263, 264 to 265, 266 to 267, 268 to 269, 270 to 271, 272 to 273, 274 to 275, 276 to 277, 278 to 279, 280 to 281, 282 to 283, 284 to 285, 286 to 287, 288 to 289, 290 to 291, 292 to 293, 294 to 295, 296 to 297, 298 to 299, 300 to 301, 302 to 303, 304 to 305, 306 to 307, 308 to 309, 310 to 311, 312 to 313, 314 to 315, 316 to 317, 318 to 319, 320 to 321, 322 to 323, 324 to 325, 326 to 327, 328 to 329, 330 to 331, 332 to 333, 334 to 335, 336 to 337, 338 to 339, 340 to 341, 342 to 343, 344 to 345, 346 to 347, 348 to 349, 350 to 351, 352 to 353, 354 to 355, 356 to 357, 358 to 359, 360 to 361, 362 to 363, 364 to 365, 366 to 367, 368 to 369, 370 to 371, 372 to 373, 374 to 375, 376 to 377, 378 to 379, 380 to 381, 382 to 383, 384 to 385, 386 to 387, 388 to 389, 390 to 391, 392 to 393, 394 to 395, 396 to 397, 398 to 399, 400 to 401, 402 to 403, 404 to 405, 406 to 407, 408 to 409, 410 to 411, 412 to 413, 414 to 415, 416 to 417, 418 to 419, 420 to 421, 422 to 423, 424 to 425, 426 to 427, 428 to 429, 430 to 431, 432 to 433, 434 to 435, 436 to 437, 438 to 439, 440 to 441, 442 to 443, 444 to 445, 446 to 447, 448 to 449, 450 to 451, 452 to 453, 454 to 455, 456 to 457, 458 to 459, 460 to 461, 462 to 463, 464 to 465, 466 to 467, 468 to 469, 470 to 471, 472 to 473, 474 to 475, 476 to 477, 478 to 479, 480 to 481, 482 to 483, 484 to 485, 486 to 487, 488 to 489, 490 to 491, 492 to 493, 494 to 495, 496 to 497, 498 to 499, 500 to 501, 502 to 503, 504 to 505, 506 to 507, 508 to 509, 510 to 511, 512 to 513, 514 to 515, 516 to 517, 518 to 519, 520 to 521, 522 to 523, 524 to 525, 526 to 527, 528 to 529, 530 to 531, 532 to 533, 534 to 535, 536 to 537, 538 to 539, 540 to 541, 542 to 543, 544 to 545, 546 to 547, 548 to 549, 550 to 551, 552 to 553, 554 to 555, 556 to 557, 558 to 559, 560 to 561, 562 to 563, 564 to 565, 566 to 567, 568 to 569, 570 to 571, 572 to 573, 574 to 575, 576 to 577, 578 to 579, 580 to 581, 582 to 583, 584 to 585, 586 to 587, 588 to 589, 590 to 591, 592 to 593, 594 to 595, 596 to 597, 598 to 599, 600 to 601, 602 to 603, 604 to 605, 606 to 607, 608 to 609, 610 to 611, 612 to 613, 614 to 615, 616 to 617, 618 to 619, 620 to 621, 622 to 623, 624 to 625, 626 to 627, 628 to 629, 630 to 631, 632 to 633, 634 to 635, 636 to 637, 638 to 639, 640 to 641, 642 to 643, 644 to 645, 646 to 647, 648 to 649, 650 to 651, 652 to 653, 654 to 655, 656 to 657, 658 to 659, 660 to 661, 662 to 663, 664 to 665, 666 to 667, 668 to 669, 670 to 671, 672 to 673, 674 to 675, 676 to 677, 678 to 679, 680 to 681, 682 to 683, 684 to 685, 686 to 687, 688 to 689, 690 to 691, 692 to 693, 694 to 695, 696 to 697, 698 to 699, 700 to 701, 702 to 703, 704 to 705, 706 to 707, 708 to 709, 710 to 711, 712 to 713, 714 to 715, 716 to 717, 718 to 719, 720 to 721, 722 to 723, 724 to 725, 726 to 727, 728 to 729, 730 to 731, 732 to 733, 734 to 735, 736 to 737, 738 to 739, 740 to 741, 742 to 743, 744 to 745, 746 to 747, 748 to 749, 750 to 751, 752 to 753, 754 to 755, 756 to 757, 758 to 759, 760 to 761, 762 to 763, 764 to 765, 766 to 767, 768 to 769, 770 to 771, 772 to 773, 774 to 775, 776 to 777, 778 to 779, 780 to 781, 782 to 783, 784 to 785, 786 to 787, 788 to 789, 790 to 791, 792 to 793, 794 to 795, 796 to 797, 798 to 799, 800 to 801, 802 to 803, 804 to 805, 806 to 807, 808 to 809, 810 to 811, 812 to 813, 814 to 815, 816 to 817, 818 to 819, 820 to 821, 822 to 823, 824 to 825, 826 to 827, 828 to 829, 830 to 831, 832 to 833, 834 to 835, 836 to 837, 838 to 839, 840 to 841, 842 to 843, 844 to 845, 846 to 847, 848 to 849, 850 to 851, 852 to 853, 854 to 855, 856 to 857, 858 to 859, 860 to 861, 862 to 863, 864 to 865, 866 to 867, 868 to 869, 870 to 871, 872 to 873, 874 to 875, 876 to 877, 878 to 879, 880 to 881, 882 to 883, 884 to 885, 886 to 887, 888 to 889, 890 to 891, 892 to 893, 894 to 895, 896 to 897, 898 to 899, 900 to 901, 902 to 903, 904 to 905, 906 to 907, 908 to 909, 910 to 911, 912 to 913, 914 to 915, 916 to 917, 918 to 919, 920 to 921, 922 to 923, 924 to 925, 926 to 927, 928 to 929, 930 to 931, 932 to 933, 934 to 935, 936 to 937, 938 to 939, 940 to 941, 942 to 943, 944 to 945, 946 to 947, 948 to 949, 950 to 951, 952 to 953, 954 to 955, 956 to 957, 958 to 959, 960 to 961, 962 to 963, 964 to 965, 966 to 967, 968 to 969, 970 to 971, 972 to 973, 974 to 975, 976 to 977, 978 to 979, 980 to 981, 982 to 983, 984 to 985, 986 to 987, 988 to 989, 990 to 991, 992 to 993, 994 to 995, 996 to 997, 998 to 999, 1000 to 1001, 1002 to 1003, 1004 to 1005, 1006 to 1007, 1008 to 1009, 1010 to 1011, 1012 to 1013, 1014 to 1015, 1016 to 1017, 1018 to 1019, 1020 to 1021, 1022 to 1023, 1024 to 1025, 1026 to 1027, 1028 to 1029, 1030 to 1031, 1032 to 1033, 1034 to 1035, 1036 to 1037, 1038 to 1039, 1040 to 1041, 1042 to 1043, 1044 to 1045, 1046 to 1047, 1048 to 1049, 1050 to 1051, 1052 to 1053, 1054 to 1055, 1056 to 1057, 1058 to 1059, 1060 to 1061, 1062 to 1063, 1064 to 1065, 1066 to 1067, 1068 to 1069, 1070 to 1071, 1072 to 1073, 1074 to 1075, 1076 to 1077, 1078 to 1079, 1080 to 1081, 1082 to 1083, 1084 to 1085, 1086 to 1087, 1088 to 1089, 1090 to 1091, 1092 to 1093, 1094 to 1095, 1096 to 1097, 1098 to 1099, 1100 to 1101, 1102 to 1103, 1104 to 1105, 1106 to 1107, 1108 to 1109, 1110 to 1111, 1112 to 1113, 1114 to 1115, 1116 to 1117, 1118 to 1119, 1120 to 1121, 1122 to 1123, 1124 to 1125, 1126 to 1127, 1128 to 1129, 1130 to 1131, 1132 to 1133, 1134 to 1135, 1136 to 1137, 1138 to 1139, 1140 to 1141, 1142 to 1143, 1144 to 1145, 1146 to 1147, 1148 to 1149, 1150 to 1151, 1152 to 1153, 1154 to 1155, 1156 to 1157, 1158 to 1159, 1160 to 1161, 1162 to 1163, 1164 to 1165, 1166 to 1167, 1168 to 1169, 1170 to 1171, 1172 to 1173, 1174 to 1175, 1176 to 1177, 1178 to 1179, 1180 to 1181, 1182 to 1183, 1184 to 1185, 1186 to 1187, 1188 to 1189, 1190 to 1191, 1192 to 1193, 1194 to 1195, 1196 to 1197, 1198 to 1199, 1200 to 1201, 1202 to 1203, 1204 to 1205, 1206 to 1207, 1208 to 1209, 1210 to 1211, 1212 to 1213, 1214 to 1215, 1216 to 1217, 1218 to 1219, 1220 to 1221, 1222 to 1223, 1224 to 1225, 1226 to 1227, 1228 to 1229, 1230 to 1231, 1232 to 1233, 1234 to 1235, 1236 to 1237, 1238 to 1239, 1240 to 1241, 1242 to 1243, 1244 to 1245, 1246 to 1247, 1248 to 1249, 1250 to 1251, 1252 to 1253, 1254 to 1255, 1256 to 1257, 1258 to 1259, 1260 to 1261, 1262 to 1263, 1264 to 1265, 1266 to 1267, 1268 to 1269, 1270 to 1271, 1272 to 1273, 1274 to 1275, 1276 to 1277, 1278 to 1279, 1280 to 1281, 1282 to 1283, 1284 to 1285, 1286 to 1287, 1288 to 1289, 1290 to 1291, 1292 to 1293, 1294 to 1295, 1296 to 1297, 1298 to 1299, 1300 to 1301, 1302 to 1303, 1304 to 1305, 1306 to 1307, 1308 to 1309, 1310 to 1311, 1312 to 1313, 1314 to 1315, 1316 to 1317, 1318 to 1319, 1320 to 1321, 1322 to 1323, 1324 to 1325, 1326 to 1327, 1328 to 1329, 1330 to 1331, 1332 to 1333, 1334 to 1335, 1336 to 1337, 1338 to 1339, 1340 to 1341, 1342 to 1343, 1344 to 1345, 1346 to 1347, 1348 to 1349, 1350 to 1351, 1352 to 1353, 1354 to 1355, 1356 to 1357, 1358 to 1359, 1360 to 1361, 1362 to 1363, 1364 to 1365, 1366 to 1367, 1368 to 1369, 1370 to 1371, 1372 to 1373, 1374 to 1375, 1376 to 1377, 1378 to 1379, 1380 to 1381, 1382 to 1383, 1384 to 1385, 1386 to 1387, 1388 to 1389, 1390 to 1391, 1392 to 1393, 1394 to 1395, 1396 to 1397, 1398 to 1399, 1400 to 1401, 1402 to 1403, 1404 to 1405, 1406 to 1407, 1408 to 1409, 1410 to 1411, 1412 to 1413, 1414 to 1415, 1416 to 1417, 1418 to 1419, 1420 to 1421, 1422 to 1423, 1424 to 1425, 1426 to 1427, 1428 to 1429, 1430 to 1431, 1432 to 1433, 1434 to 1435, 1436 to 1437, 1438 to 1439, 1440 to 1441, 1442 to 1443, 1444 to 1445, 1446 to 1447, 1448 to 1449, 1450 to 1451, 1452 to 1453, 1454 to 1455, 1456 to 1457, 1458 to 1459, 1460 to 1461, 1462 to 1463, 1464 to 1465, 1466 to 1467, 1468 to 1469, 1470 to 1471, 1472 to 1473, 1474 to 1475, 1476 to 1477, 1478 to 1479, 1480 to 1481, 1482 to 1483, 1484 to 1485, 1486 to 1487, 1488 to 1489, 1490 to 1491, 1492 to 1493, 1494 to 1495, 1496 to 1497, 1498 to 1499, 1500 to 1501, 1502 to 1503, 1504 to 1505, 1506 to 1507, 1508 to 1509, 1510 to 1511, 1512 to 1513, 1514 to 1515, 1516 to 1517, 1518 to 1519, 1520 to 1521, 1522 to 1523, 1524 to 1525, 1526 to 1527, 1528 to 1529, 1530 to 1531, 1532 to 1533, 1534 to 1535, 1536 to 1537, 1538 to 1539, 1540 to 1541, 1542 to 1543, 1544 to 1545, 1546 to 1547, 1548 to 1549, 1550 to 1551, 1552 to 1553, 1554 to 1555, 1556 to 1557, 1558 to 1559, 1560 to 1561, 1562 to 1563, 1564 to 1565, 1566 to 1567, 1568 to 1569, 1570 to 1571, 1572 to 1573, 1574 to 1575, 1576 to 1577, 1578 to 1579, 1580 to 1581, 1582 to 1583, 1584 to 1585, 1586 to 1587, 1588 to 1589, 1590 to 1591, 1592 to 1593, 1594 to 1595, 1596 to 1597, 1598 to 1599, 1600 to 1601, 1602 to 1603, 1604 to 1605, 1606 to 1607, 1608 to 1609, 1610 to 1611, 1612 to 1613, 1614 to 1615, 1616 to 1617, 1618 to 1619, 1620 to 1621, 1622 to 1623, 1624 to 1625, 1626 to 1627, 1628 to 1629, 1630 to 1631, 1632 to 1633, 1634 to 1635, 1636 to 1637, 1638 to 1639, 1640 to 1641, 1642 to 1643, 1644 to 1645, 1646 to 1647, 1648 to 1649, 1650 to 1651, 1652 to 1653, 1654 to 1655, 1656 to 1657, 1658 to 1659, 1660 to 1661, 1662 to 1663, 1664 to 1665, 1666 to 1667, 1668 to 1669, 1670 to 1671, 1672 to 1673, 1674 to 1675, 1676 to 1677, 1678 to 1679, 1680 to 1681, 1682 to 1683, 1684 to 1685, 1686 to 1687, 1688 to 1689, 1690 to 1691, 1692 to 1693, 1694 to 1695, 1696 to 1697, 1698 to 1699, 1700 to 1701, 1702 to 1703, 1704 to 1705, 1706 to 1707, 1708 to 1709, 1710 to 1711, 1712 to 1713, 1714 to 1715, 1716 to 1717, 1718 to 1719, 1720 to 1721, 1722 to 1723, 1724 to 1725, 1726 to 1727, 1728 to 1729, 1730 to 1731, 1732 to 1733, 1734 to 1735, 1736 to 1737, 1738 to 1739, 1740 to 1741, 1742 to 1743, 1744 to 1745, 1746 to 1747, 1748 to 1749, 1750 to 1751, 1752 to 1753, 1754 to 1755, 1756 to 1757, 1758 to 1759, 1760 to 1761, 1762 to 1763, 1764 to 1765, 1766 to 1767, 1768 to 1769, 1770 to 1771, 1772 to 1773, 1774 to 1775, 1776 to 1777, 1778 to 1779, 1780 to 1781, 1782 to 1783, 1784 to 1785, 1786 to 1787, 1788 to 1789, 1790 to 1791, 1792 to 1793, 1794 to 1795, 1796 to 1797, 1798 to 1799, 1800 to 1801, 1802 to 1803, 1804 to 1805, 1806 to 1807, 1808 to 1809, 1810 to 1811, 1812 to 1813, 1814 to 1815, 1816 to 1817, 1818 to 1819, 1820 to 1821, 1822 to 1823, 1824 to 1825, 1826 to 1827, 1828 to 1829, 1830 to 1831, 1832 to 1833, 1834 to 1835, 1836 to 1837, 1838 to 1839, 1840 to 1841, 1842 to 1843, 1844 to 1845, 1846 to 1847, 1848 to 1849, 1850 to 1851, 1852 to 1853, 1854 to 1855, 1856 to 1857, 1858 to 1859, 1860 to 1861, 1862 to 1863, 1864 to 1865, 1866 to 1867, 1868 to 1869, 1870 to 1871, 1872 to 1873, 1874 to 1875, 1876 to 1877, 1878 to 1879, 1880 to 1881, 1882 to 1883, 1884 to 1885, 1886 to 1887, 1888 to 1889, 1890 to 1891, 1892 to 1893, 1894 to 1895, 1896 to 1897, 1898 to 1899, 1900 to 1901, 1902 to 1903, 1904 to 1905, 1906 to 1907, 1908 to 1909, 1910 to 1911, 1912 to 1913, 1914 to 1915, 1916 to 1917, 1918 to 1919, 1920 to 1921, 1922 to 1923, 1924 to 1925, 1926 to 1927, 1928 to 1929, 1930 to 1931, 1932 to 1933, 1934 to 1935, 1936 to 1937, 1938 to 1939, 1940 to 1941, 1942 to 1943, 1944 to 1945, 1946 to 1947, 1948 to 1949, 1950 to 1951, 1952 to 1953, 1954 to 1955, 1956 to 1957, 1958 to 1959, 1960 to 1961, 1962 to 1963, 1964 to 1965, 1966 to 1967, 1968 to 1969, 1970 to 1971, 1972 to 1973, 1974 to 1975, 1976 to 1977, 1978 to 1979, 1980 to 1981, 1982 to 1983, 1984 to 1985, 1986 to 1987, 1988 to 1989, 1990 to 1991, 1992 to 1993, 1994 to 1995, 1996 to 1997, 1998 to 1999, 2000 to 2001, 2002 to 2003, 2004 to 2005, 2006 to 2007, 2008 to 2009, 2010 to 2011, 2012 to 2013, 2014 to 2015, 2016 to 2017, 2018 to 2019, 2020 to 2021, 2022 to 2023, 2024 to 2025, 2026 to 2027, 2028 to 2029, 2030 to 2031, 2032 to 2033, 2034 to 2035, 2036 to 2037, 2038 to 2039, 2040 to 2041, 2042 to 2043, 2044 to 2045, 2046 to 2047, 2048 to 2049, 2050 to 2051, 2052 to 2053, 2054 to 2055, 2056 to 2057, 2058 to 2059, 2060 to 2061, 2062 to 2063, 2064 to 2065, 2066 to 2067, 2068 to 2069, 2070 to 2071, 2072 to 2073, 2074 to 2075, 2076 to 2077, 2078 to 2079, 2080 to 2081, 2082 to 2083, 2084 to 2085, 2086 to 2087, 2088 to 2089, 2090 to 2091, 2092 to 2093, 2094 to 2095, 2096 to 2097, 2098 to 2099, 2100 to 2101, 2102 to 2103, 2104 to 2105, 2106 to 2107, 2108 to 2109, 2110 to 2111, 2112 to 2113, 2114 to 2115, 2116 to 2117, 2118 to 2119, 2120 to 2121, 2122 to 2123, 2124 to 2125, 2126 to 2127, 2128 to 2129, 2130 to 2131, 2132 to 2133, 2134 to 2135, 2136 to 2137, 2138 to 2139, 2140 to 2141, 2142 to 2143, 2144 to 2145, 2146 to 2147, 2148 to 2149, 2150 to 2151, 2152 to 2153, 2154 to 2155, 2156 to 2157, 2158 to 2159, 2160 to 2161, 2162 to 2163, 2164 to 2165, 2166 to 2167, 2168 to 2169, 2170 to 2171, 2172 to 2173, 2174 to 2175, 2176 to 2177, 2178 to 2179, 2180 to 2181, 2182 to 2183, 2184 to 2185, 2186 to 2187, 2188 to 2189, 2190 to 2191, 2192 to 2193, 2194 to 2195, 2196 to 2197, 2198 to 2199, 2200 to 2201, 2202 to 2203, 2204 to 2205, 2206 to 2207, 2208 to 2209, 2210 to 2211, 2212 to 2213, 2214 to 2215, 2216 to 2217, 2218 to 2219, 2220 to 2221, 2222 to 2223, 2224 to 2225, 2226 to 2227, 2228 to 2229, 2230 to 2231, 2232 to 2233,


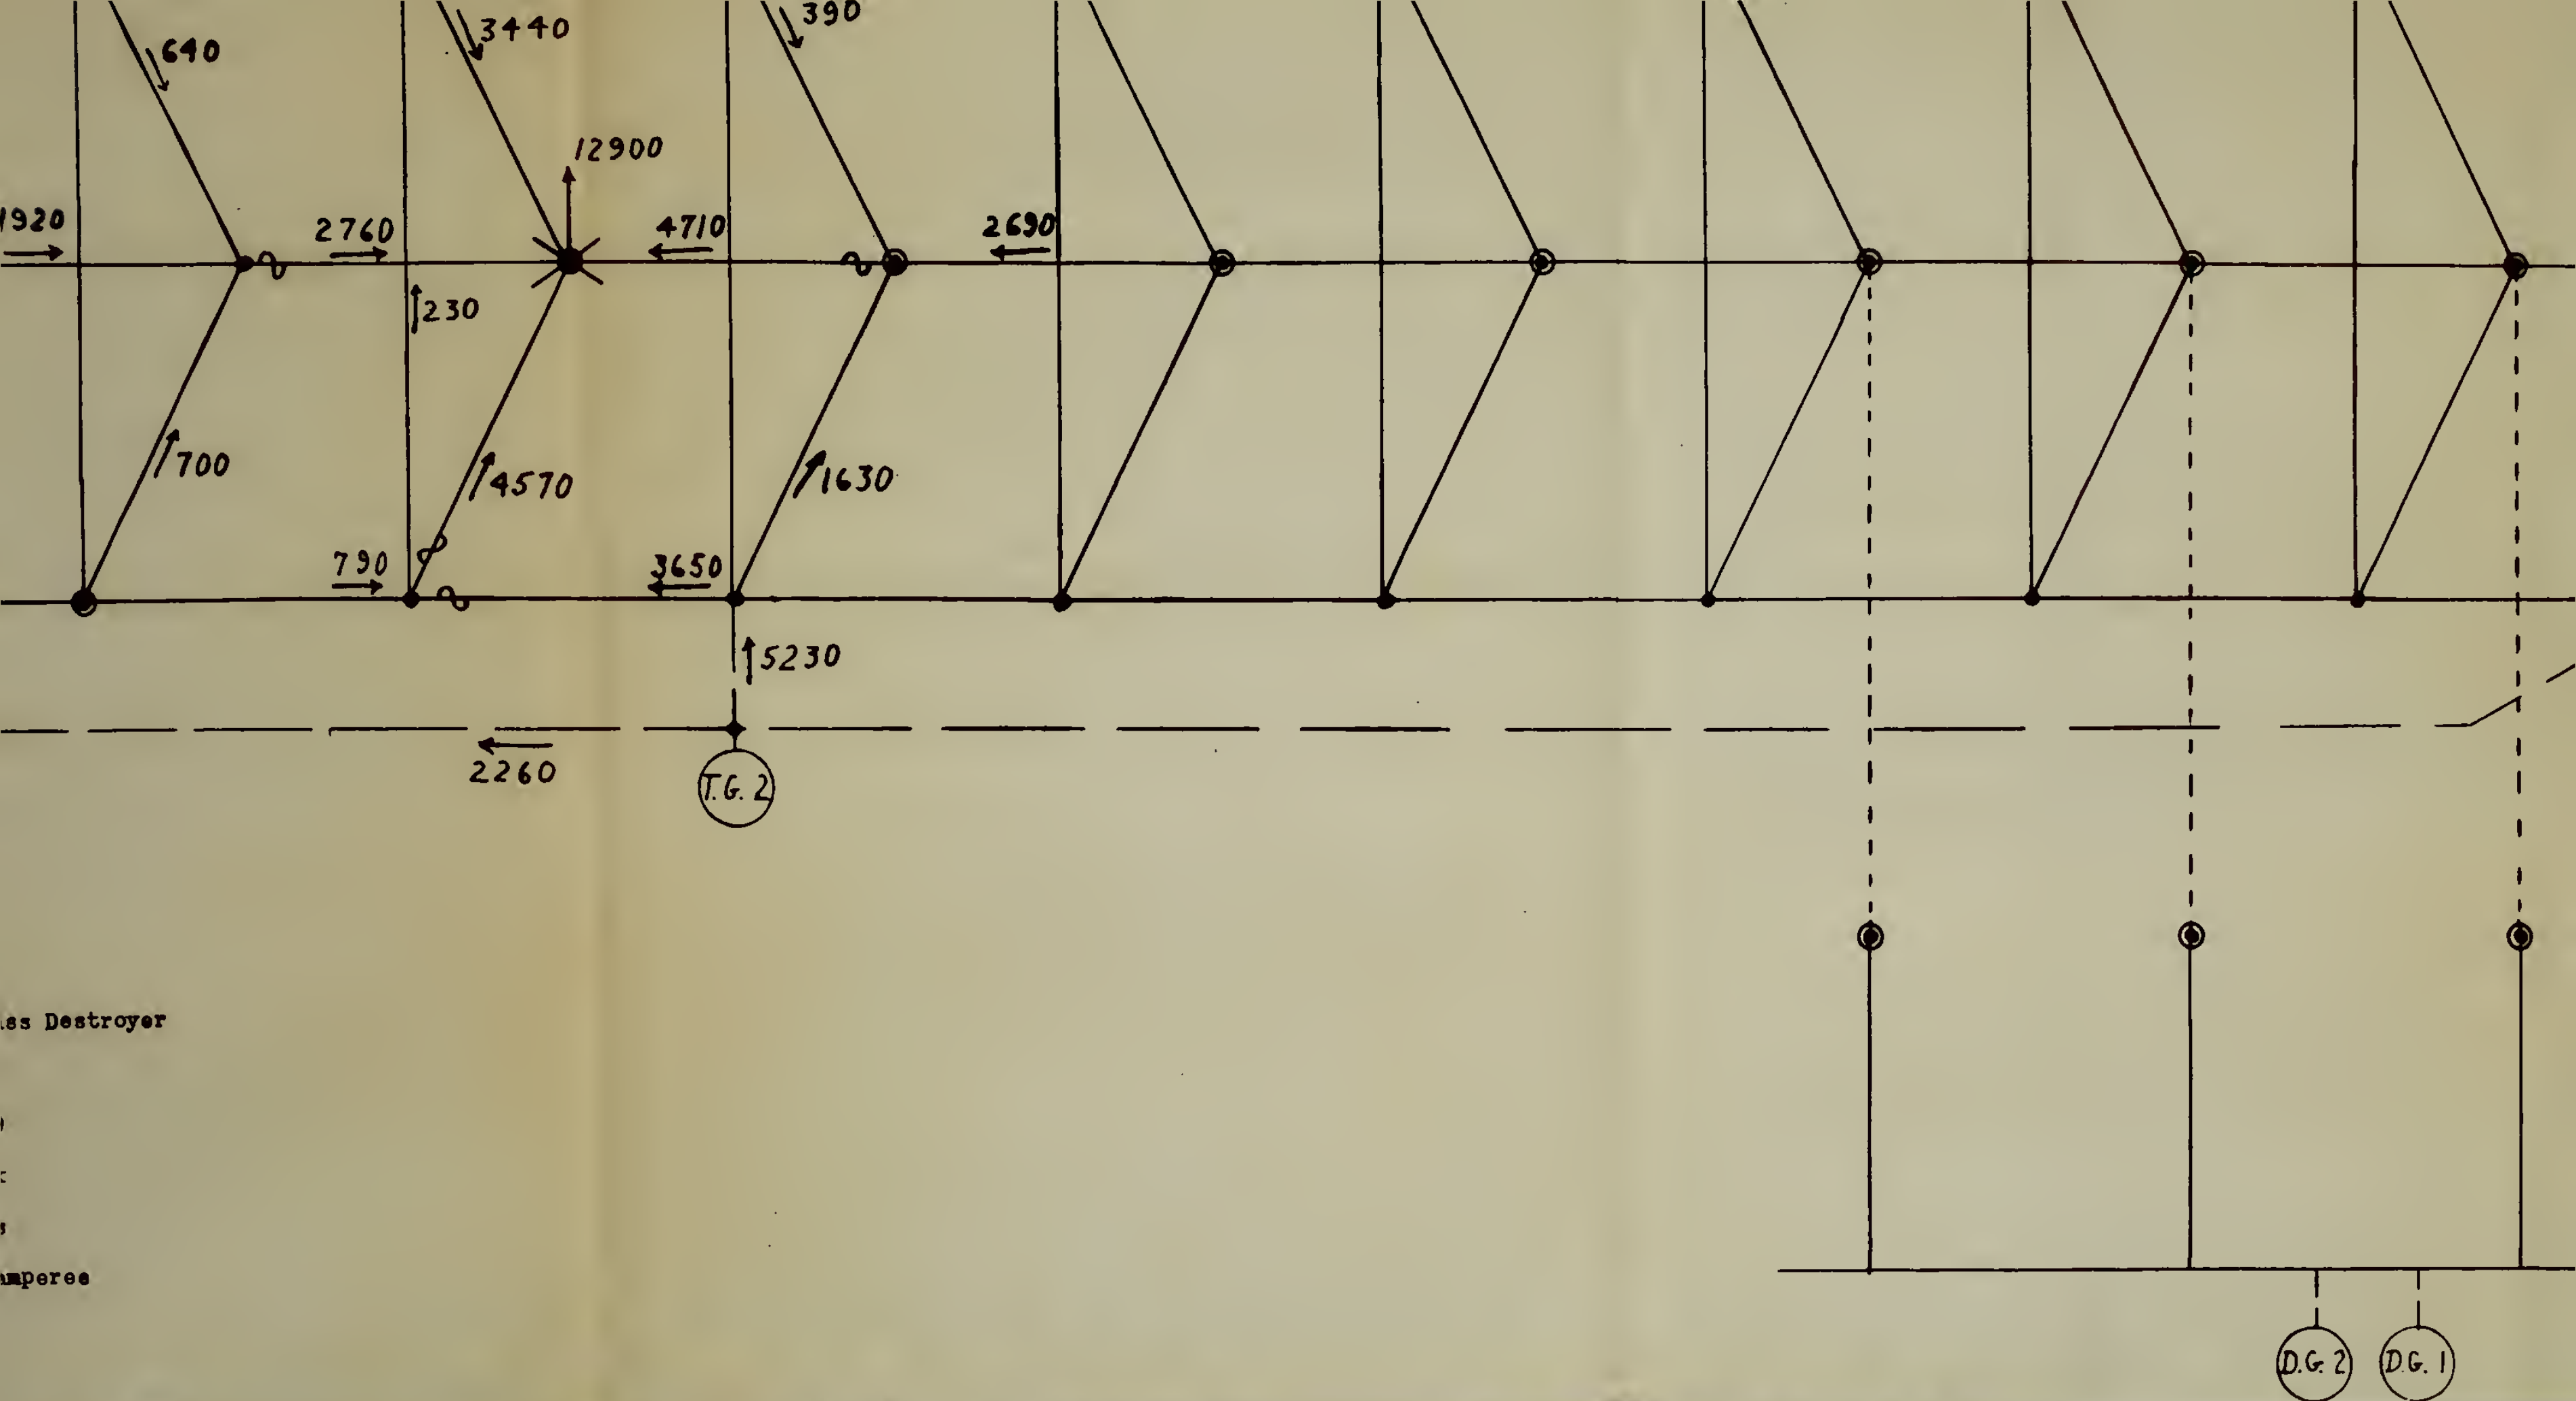


Figure 6



Diagram for the Class Diagram
 Diagram for the Class Diagram
 Diagram for the Class Diagram
 Diagram for the Class Diagram
 Diagram for the Class Diagram
 Diagram for the Class Diagram

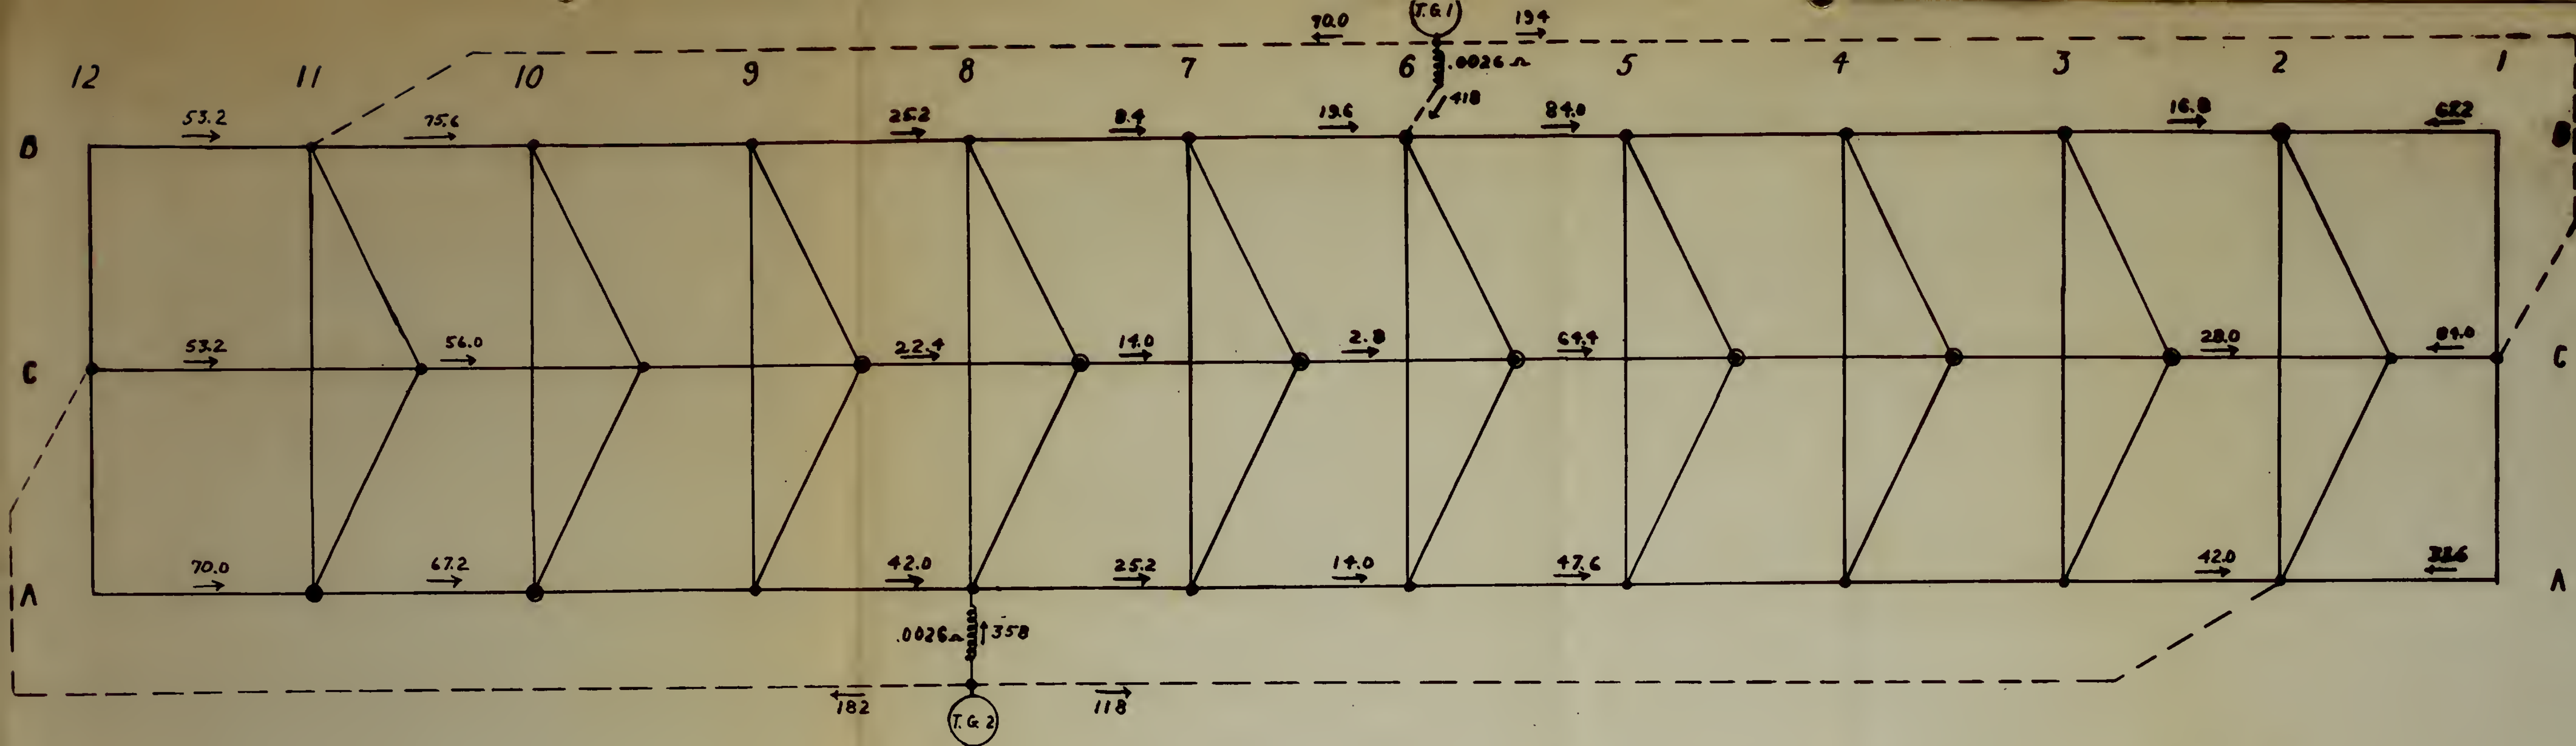

Network for 692 Class Destroyer

Generation Plan #3

Normal Battle Operation

THFA 250 in Network

THFA 400 in Feeders

Currents shown in amperes

Vector power:

DG 1 6.4 - j4.4 KVA

DG 2 6.4 - j4.4

TG 1 23.8 - j18.6

TG 2 21.8 - j18.1


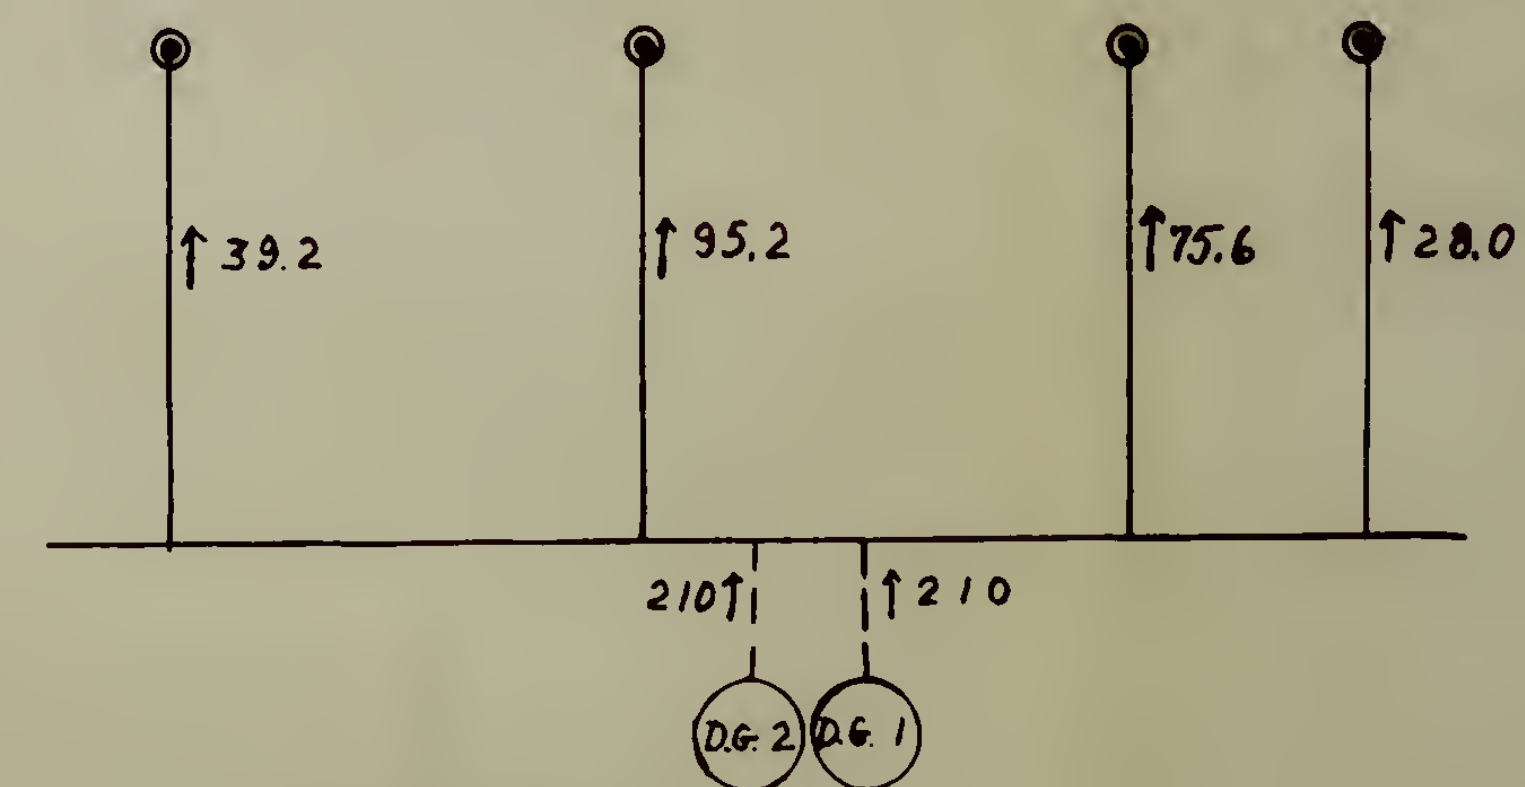


Figure 7



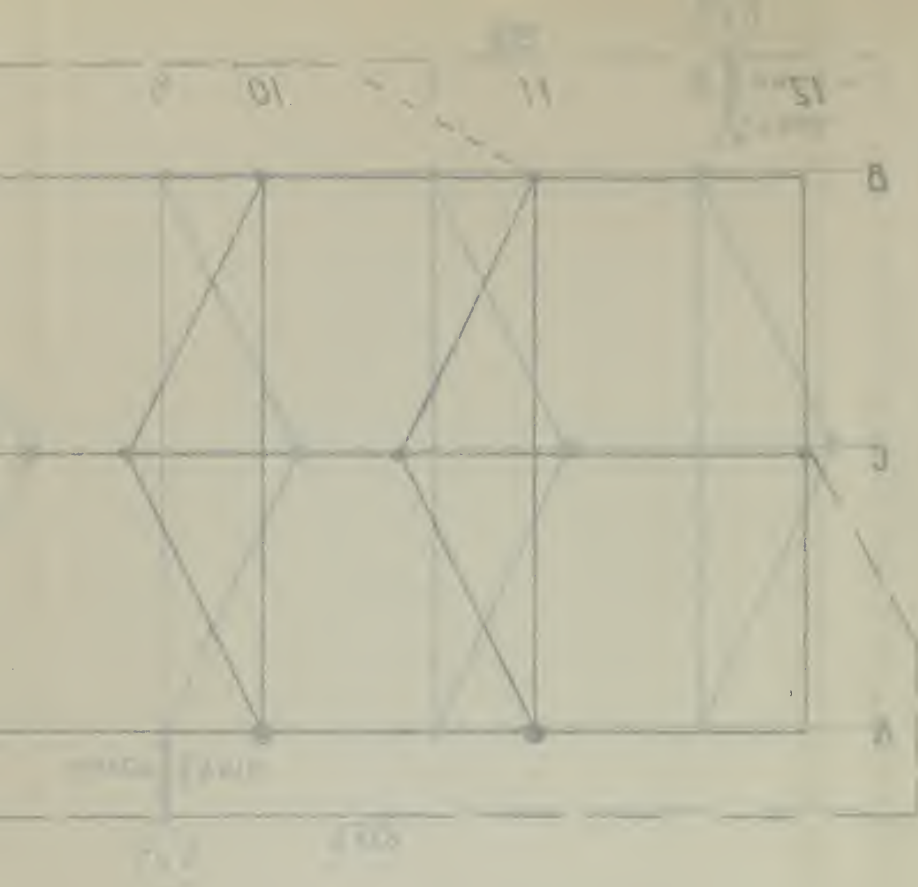

1. The drawing is oriented horizontally on the page.
 2. The drawing shows a structural frame with internal bracing.
 3. The dimensions are given in feet: 15' (width), 11' (height), and 10' (width of a section).
 4. The labels include 'A', 'B', 'C', 'D', 'E', 'F', 'G', 'H', 'I', 'J', 'K', 'L', 'M', 'N', 'O', 'P', 'Q', 'R', 'S', 'T', 'U', 'V', 'W', 'X', 'Y', 'Z'.

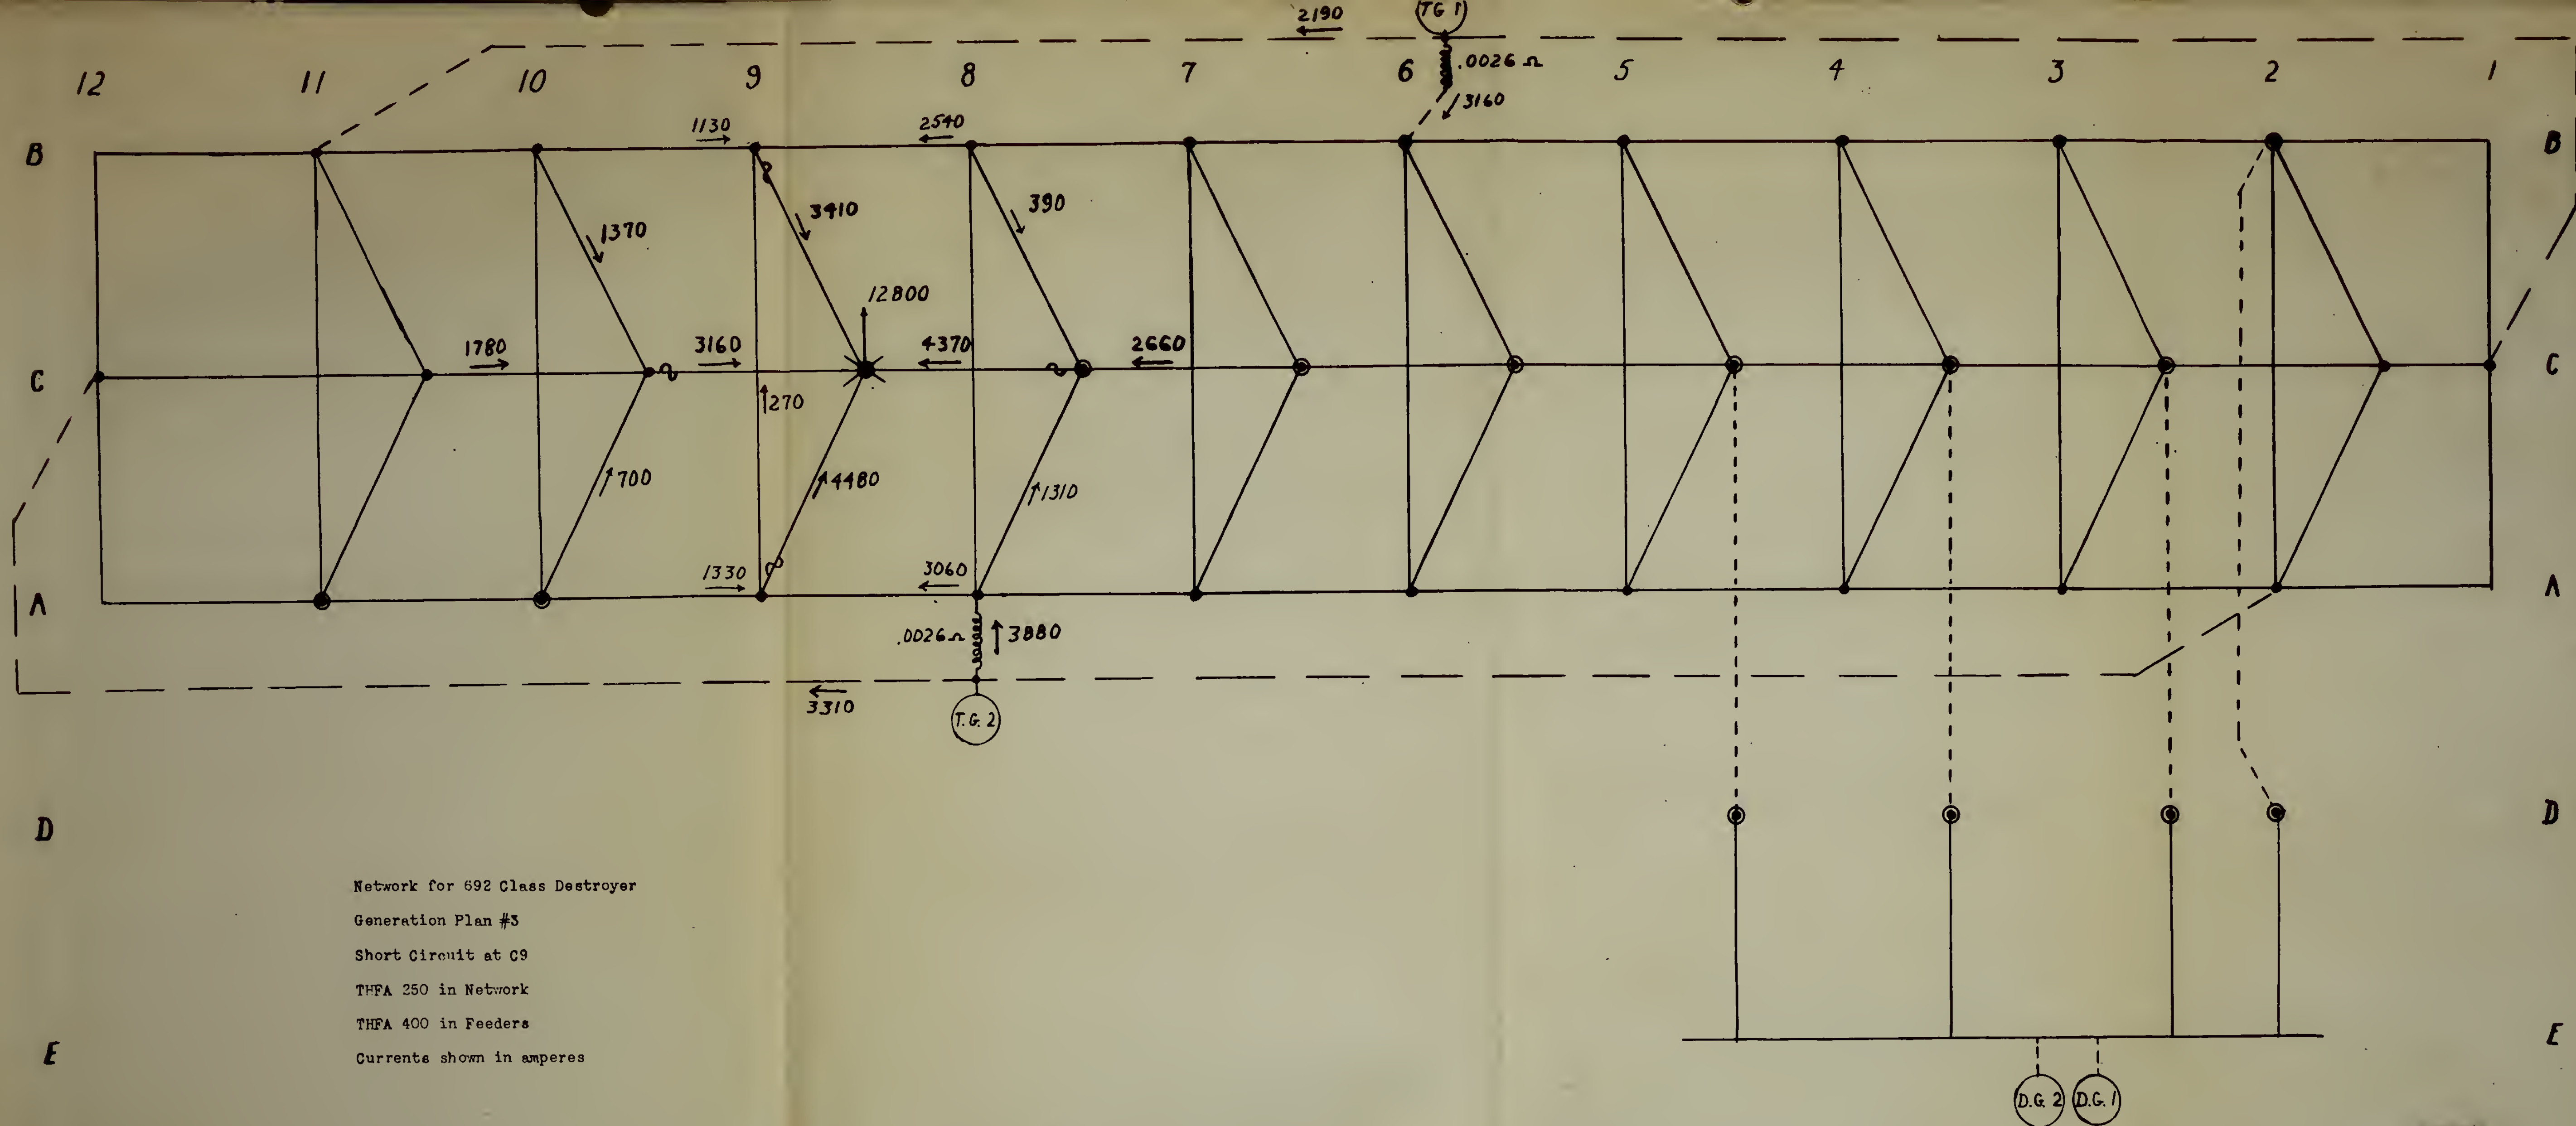


Figure 9

V Discussion of Results

The most noticeable feature of the network is the variation in current loading among the different cables. The more evenly this division can be made among lines performing parallel functions, the smaller the required cable size may be. Some correction may be made within the network itself. Larger ships should always have at least four longitudinal cable runs instead of three. The larger number permits smaller size and the increase in weight in the system (if any) will be negligible. On the other hand the larger number of cables will withstand damage better if the ship is large enough to locate each run where it will not be in the same damage area as another such run. Destroyers represent the borderline case. For the 692 class, the design would be improved by using four lines amidships (Mount 52 to Mount 44 inclusive) with three lines in the finer portions. The arrangement of feeders used from the diesel generators makes an effective substitute for the fourth line in that area.

Cable loading can be reduced if the power is fed into the network at the place and in the quantity locally required. If the power is not apportioned to the local need, there must be current flow away from the area. This would seem to call for locating the generators in the areas of greatest power consumption, except for the fact that location of the turbo-generators is fairly well fixed in Naval vessels by

V Discussion of Results

The most noticeable feature of the network is the variation in current loading among the different cables. The more evenly this division can be made among lines performing parallel functions, the smaller the required cable size will be. Some correction may be made within the network itself. Larger ships should always have at least four longitudinal cable runs instead of three. The larger number permits smaller size and the increase in weight in the system (if any) will be negligible. On the other hand the larger number of cables will withstand damage better if the ship is large enough to locate each run where it will not be in the same damage area as another such run. Distributors represent the bottleneck case. For the 455 class, the design would be improved by using four lines instead of (about 25 to Mount 44 inclusive) with three lines in the liner portions. The arrangement of feeders used from the diesel generators makes an effective substitute for the latter line in that area.

Cable loading can be reduced if the power is fed into the network at the place and in the quantity locally required. If the power is not apportioned to the local need, there must be current flow away from the area. This would seem to call for locating the generator in the area of greatest power consumption, except for the fact that location of the turbo-generator is fairly well fixed in Naval vessels by

the position the engine rooms in the midship section of the ship. As in Figures 3 and 7, this results in light power flow in the sections between the generators with heavy flow toward the ends of the ship. However the location of the diesel generators is more freely selected and they should be placed where they can supply the heavy-load areas with the least current flow.

Whether or not the location of the generators is favorable, feeders carry the power to remote as well as local parts of the network. However because of the greater distances to the further points, current flow is heavier in the shorter feeders. Control of the division of power among the feeders is necessary to equalize the cable loading in the network. Experimentation with the network analyzer showed that it is more effective to increase the impedance of the short feeders than to lower the impedance of the long ones. Lowering impedance means using a parallel cable to a line which is already of very large size. Increasing impedance can be done simply by the use of additional resistance with a loss of about half a kilowatt per generator dissipated as heat. A reactor for high current flow is more cumbersome but would avoid most of the power loss. The optimum size of reactor was not investigated; a variable reactor might even be considered.

Short circuit conditions require that current approach the short from both ends of the network. If this does not

the position the engine room in the midship section of the ship. As in Figures 5 and 6, this results in light power flow in the section between the generator and heavy flow toward the stern of the ship. However the location of the diesel generators is more evenly selected and they should be placed where they can supply the heavy-load areas with the least current flow.

Whether or not the location of the generators is favorable, leaders carry the power to remote as well as local parts of the network. However because of the greater distance to the former points, current flow is heavier in the heavier leaders. Control of the division of power among the leaders is necessary to equalize the cable loading in the network. Experimentation with the network analyzer showed that it is more effective to increase the impedance of the short leaders than to lower the impedance of the long ones. Lowering impedance means using a parallel cable to a line which is already at very large size. Therefore impedance can be done simply by the use of additional resistance with a loss of about half a kilowatt per generator dissipated as heat. A resistor for high current flow is more cumbersome but would avoid most of the power loss. The question also of resistor was not investigated; a variable resistor might even be considered.

Most circuit conditions require that current approach the same from both ends of the network. If this does not

happen, or the current approaching from one end is insufficient, selective operation of the limiters will not take place. Figure 6 is an example of this. Here again the use of a reactor cured the difficulty as shown in Figure 9. Generation Plan #2 (and subsequently #3) was formed when it was realized that it was necessary for damage control reasons to provide more than one feeder to the ends of the network. Otherwise damage to a single feeder could greatly impair the resistance of the network to short circuit.

Load control, which is the prominent feature of the radial system, is entirely absent in the network system. Because the vital load of the 692 class destroyer is located in the forward end of the ship and because of the size of the generators in this class of ship, the problem was simplified. Each main generator could carry the total load of the ship so that load control was not required for them. By placing the diesel generators together in the heavy load area forward and by making it possible to disconnect this part of the network from the rest, the diesels were protected from overload in case of failure of the two main generators. However on larger ships no one generator can carry the whole load of the network. The best arrangement is to have:

- 2 or 3 generators each capable of carrying all the load
- 4 or 5 generators each capable of carrying half the load
- 6 or 7 generators each capable of carrying $1/3$ the load

When damage reduces the number of generators below that needed

happened, by the current spreading from one end to the other, selective operation of the relays will not take place. Figure 6 is an example of this. There again the use of a resistor across the difficulty is shown in Figure 7. Generation time t_g (and subsequently t_d) was found when it was realized that it was necessary for heavy control systems to provide some kind of leader to the ends of the network. Otherwise damage to a single leader could mean the ruin of the network to some extent.

Load control, which is the present feature of the radial system, is entirely absent in the network system. Because the vital load of the QZ class destroyer is located in the forward end of the ship and because of the size of the generators in this class of ship, the problem was simplified. Each main generator would carry the total load of the ship so that load control was not required for them. By placing the diesel generator together in the heavy load area forward and by making it possible to disconnect this part of the network from the rest, the diesels were protected from overload in case of failure of the two main generators. However, on larger ships no one generator can carry the whole load of the network. The best arrangement is to have 2 or 3 generators each capable of carrying all the load or 5 generators each capable of carrying half the load or 7 generators each capable of carrying $\frac{1}{7}$ the load. This design reduces the number of generators below that needed

to supply the network, the damage will be so severe that casualty power will probably suffice. Other means of reducing the load have been discussed previously, but all have the drawback of reducing the simplicity of the network.

Increased continuity of power remains the undisputed virtue of the network. However the same continuity plus load control can be had for the radial system loads most requiring it by joining the normal, alternate and emergency feeders to a common bus with the load and near it. By placing inverse power relays at each end of the feeders, load control is retained as well as protection in the case of false operation of one of the relays. The number of loads provided with this "continuous power bus" would necessarily be limited to keep down the number of inverse power relays, and the excess weight probably would not exceed that required for a network system.

The reliability of a network should equal or exceed that of the radial distribution providing its cables are of such capacity that they will not be overloaded when parallel cables are damaged. The network system will weigh more than the radial system so there will be a temptation to design network cables for some condition of loading less severe than the worst possible. Use of inverse power relays may also reduce the reliability of the system if they are not carefully engineered. The use of series-parallel combinations of relays, which has been suggested throughout this thesis, should minimize any ill effects of maloperation.

to supply the network, the damage will be as severe as that caused by power will probably suffice. Other means of reducing the loss have been discussed previously, but all have the drawback of reducing the simplicity of the network.

Increased continuity of power, reducing the probability of loss of the network, however, can be consistently given load control can be had for the radial system. Inadequate protection is by joining the network, a network and emergency feeder to a common bus with the load and near it. It is possible to have power relay at each end of the feeder, load control is retained as well as protection in the case of failure operation of one of the relays. The network of loads provided with this "continuous power bus" would necessarily be limited to keep down the number of intertie power relays, and the extent which properly would not exceed that required for a network system.

The reliability of a network should equal or exceed that of the radial distribution providing the cables are of such capacity that they will not be overloaded when parallel cables are connected. The network system will weigh more than the radial system so there will be a temptation to design network cables for some condition of loading less severe than the worst possible. Use of intertie power relays may also reduce the reliability of the system if they are not carefully engineered. The use of radial-power-line combinations of relays, which has been suggested throughout this thesis, should minimize any ill effects of cooperation.

VI Conclusions

Cable loading in a network is aided by delivering power to various parts of the network in proportion to the power needs of that part. This goal is facilitated when generators can be placed in areas where the heaviest loads exist. Division of power among the various feeders emanating from a generator must also be proper to attain this objective. Increasing the impedance of feeders carrying excess current by means of a reactor was found to be better than decreasing the impedance of feeders carrying a deficiency of current.

Selective operation of limiters in a network, even after damage, requires at least two feeders from different generators to each end of the network. Reactors, which aid in arranging cable loading, also aid in current distribution under short circuit.

Load control is difficult to arrange in a network system. The need for load control can be avoided if the generators are large enough relative to the total load.

Continuity can be attained in a radial system for the loads most requiring it by tying their feeders to a bus at the load and providing inverse power relays on these feeders.

VI Conclusions

Radio loading in a network is aided by selective power
 to various parts of the network in proportion to the power
 needs of that part. This goal is facilitated when generators
 can be placed in areas where the network loads exist. Divi-
 sion of power among the various loads is made possible from a
 generator that also be proper to obtain this objective.
 Increasing the impedance of loads carrying excess current
 by means of a resistor was found to be better than decreasing
 the impedance of loads carrying a deficiency of current.
 Selective operation of lines in a network, even after
 changes, requires at least two loads from different genera-
 tors to work out of the network. Loads, which aid in
 increasing radio loading, also aid in current distribution
 among loads electrically.
 Load control is difficult to arrange in a network system.
 The need for load control can be satisfied if the generators
 are large enough relative to the total load.
 Controlling can be obtained in a radial system for the
 loads most exposed is by tying their loads to a bus at
 the load and providing inverse power relays on these loads.

VII Recommendations

The best method, presently feasible, of obtaining improved continuity of power is to connect the load and its feeders to a common bus at the load and to provide inverse power relays at either end of the feeders. This system should be tried in an actual installation.

Study should be continued on network systems as a possibility for future use.

VII Recommendations

The test method, presently feasible, of obtaining improved continuity of power is to connect the load and the conductors to a common bus at the load end to provide inverse power relay at either end of the conductors. This system should be tried in an actual installation.

Study should be continued on power systems as a possible low future use.

VIII Appendix

VIII Appendix

A. Bibliography

Navy Department, Bureau of Ships; Reference Book for Ships Service Electric Power Plants and Electric Propulsion Systems (NAVSHIPS 250-660); Chapters I, IV, V.

Navy Department, Bureau of Ships; Bureau of Ships Specification 1768(SHIPS); Generators, Electric, Alternating-Current (Shipboard use); especially section E-2d.

Navy Department, Bureau of Ships; Bureau of Ships Manual; Chapter 60, 61, 62 part I.

Navy Department, Bureau of Ships; General Specifications for Machinery for Vessels of the United States Navy; Sections S60, S61, S62, especially S62-2d and S62-2g.

Westinghouse Electric Corporation; Silent Sentinels.

1891

U.S. (WV) 550-000; Chapter 1, IV, V.
 Service Electric Power Plant and Electric Installation
 West Department, Bureau of Signal, Department of War, Signal

CR-100 (continued on); especially section H-25.
Callion 1000 (H-12); Generator, 1000 W, 110V, 60 Hz.
Navy Department, Bureau of Ships, Bureau of Ship's Supply

Very respectfully,
 Bureau of Ships,
 Bureau of Naval Ordnance,
 Washington, D. C.

Section 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000, 1001, 1002, 1003, 1004, 1005, 1006, 1007, 1008, 1009, 1010, 1011, 1012, 1013, 1014, 1015,

Investigation of the Corrosion of Steel in Seawater.

DATE DUE

[illegible]

TThesis

12864

S59825 Smith

An investigation of
various types of elec-
trical distribution
systems for warships.

Thesis

12864

S59825 Smith

An investigation of
various types of elec-
trical distribution
systems for warships.

thes559825

An investigation of various types of ele



3 2768 002 00776 7

DUDLEY KNOX LIBRARY